


ALPHATECH® X LINEAR LED LIGHTING

Professional grade, fully diffused linear LED lighting for outdoors and indoors. Made in America, AlphaTECH® X delivers reliably beautiful light in harsh environments including direct sunlight, wet locations, and submerged in fountains, swimming pools, and saunas. Top-bending and side-bending with seamless end-to-end linkability and multiple mounting options, AlphaTECH® X can take light wherever you need it.

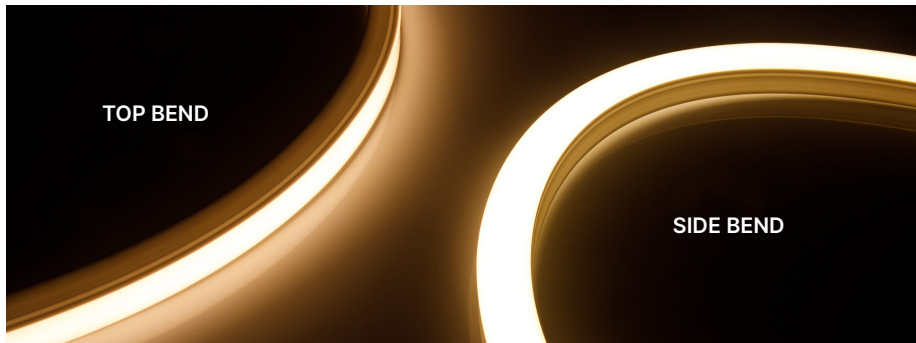

24
VDC

95+
CRI


IP69

UL
676



FEATURES & BENEFITS

- Seamless end-to-end mounting for limitless linear runs
- Top-bending and side-bending options with multiple output levels
- Factory built to custom lengths, 2-240 inches

QUICK SPECS

Voltage	24VDC
Width	15.86mm
CRI	95+
Warranty	5-Year Limited Warranty
Dimming	Dimmable
Environment	Outdoor / Submersible (IP69)
Certification	UL Listed 2108, UL676, NSF

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



SPECIFICATIONS & SKU BUILDER

DI	VOLTAGE	BEND STYLE	MODEL	LM/FT	CCT
DI	24V (24VDC)	SE (Side Bend) TE (Top Bend)	ATX	100 (Top Bend, RGBW Only) 130 (Top Bend Only) 250 (Side Bend Only) 400 (Top Bend Only)	24 (2400K) 27 (2700K) 30 (3000K) 35 (3500K) 40 (4000K)

Contact Customer Support for purchasing details: 877.817.6028

24VDC				
100 LUMEN RANGE		130 LUMEN RANGE		250 LUMEN RANGE
TOP BEND		TOP BEND		SIDE BEND
Max. Run: 16 ft. Wattage: 6.1 W/ft.		Max. Run (Seamless Interconnection): 55 ft. Max. Run (Single Piece): 20 ft. Wattage: 1.8 W/ft.		Max. Run (Seamless Interconnection): 20 ft. Max. Run (Single Piece): 16 ft. Wattage: 5.6 W/ft.
CCT	Lumens / ft.	Lumens / ft.	Lumens / ft.	Lumens / ft.
2400K	—	141	261	380
2700K	—	141	266	409
3000K	—	123	314	393
3500K	—	133	320	410
4000K	—	127	271	422
Red	18	—	—	—
Green	43	—	—	—
Blue	10	—	—	—
RGBW	122	—	—	—

LED DRIVERS	
OMNIDRIVE® X	See page 82
RGBW: Constant Voltage	See page 87

CHANNEL PROFILES		
Underwire	Surface Mount	Spine
