


SAFETY & WARNINGS

READ AND FOLLOW ALL SAFETY INSTRUCTIONS

1. Do not puncture, cut, or shorten, fixture. Doing so causes risk of electric shock and will void the Safety Certification.
2. Do not use if there is any damage to the fixture or AC cord insulation. Inspect periodically.
3. All plastics are affected by the elements and may shift in color and other properties after product installation, particularly with direct exposure to sun, chlorinated water, and other chemicals.
4. Do not submerge fixture in liquids or use the product in the vicinity of standing water or other liquids.
5. Secure fixture using only hangers or mounting clips provided. Do not secure with staples, nails, its input wire, or like means that may damage the insulation or permanently attach the fixture to a building structure.
6. Do not subject fixture to continuous flexing.
7. Do not install near areas with exposure to salt water or chlorinated water.
8. Do not install in direct sunlight or damage to the LED phosphor will occur.
9. Do not attempt to fix this product in the field.



QUICK SPECS / MODELS

Input	120VAC, 60Hz
Power	See <i>Specification Sheet</i>
Max Run	300W
Environment	Indoor / Dry Location

WARNING!

THIS IS NOT A CUSTOMIZABLE FIXTURE.
DO NOT MODIFY.

TROUBLESHOOTING

Lights are flickering	<ul style="list-style-type: none"> • Verify strip is connected to a 120VAC, 60Hz circuit. • Verify compatible Dimmer is being used.
Lights will not illuminate	<ul style="list-style-type: none"> • Ensure main power is turned On. • Check wiring to ensure proper polarity.

TOOLS & RESOURCES

COVE 120V SPECIFICATION SHEET
For full specifications.

COVE 120V Cove and Task Light


INSTALLATION GUIDE

INSTALLATION

1 TURN POWER OFF AT CIRCUIT BREAKER



SHOCK HAZARD! May result in serious injury or death. Turn power OFF at circuit breaker prior to installation.

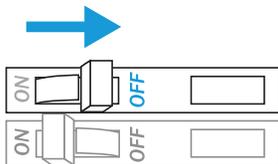


2 MOUNT FIXTURE

Note: It is recommended to use at least 2 mounting clips per fixture regardless of length.


2.1 SCREW MOUNTING CLIPS TO SURFACE

Measure and mark surface, then mount rotating mounting clips to desired position using Phillips head screwdriver.

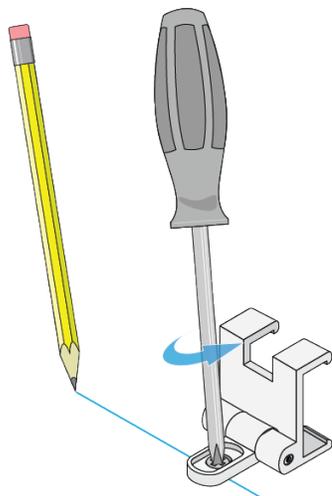


2.2 LOOSEN MOUNTING CLIP (OPTIONAL*)

Using Allen wrench, loosen screws within mounting clip.

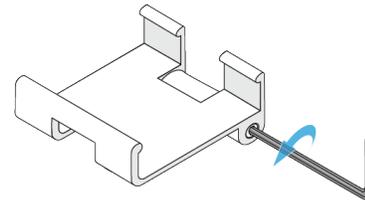


2.3 INSERT COVE FIXTURE

Insert back edge of COVE fixture into mounting clip.

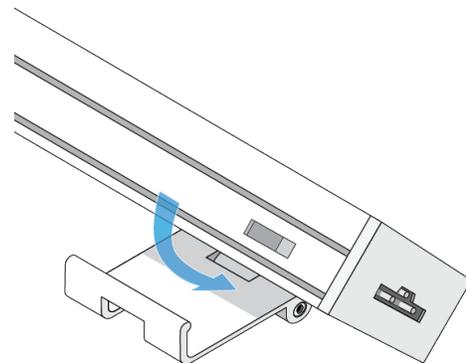

2.4 INSERT COVE FIXTURE (cont.)

Push down front edge of COVE Fixture until secured into mounting clip.

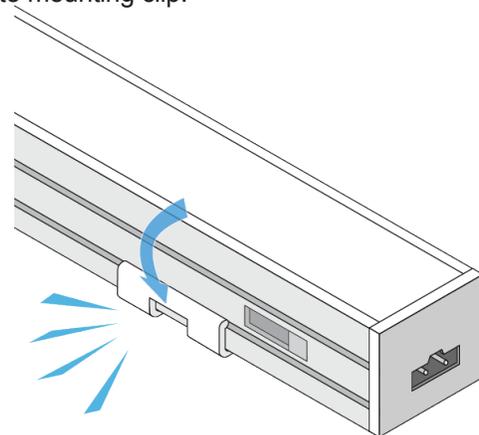


COVE 120V Cove and Task Light

INSTALLATION GUIDE

INSTALLATION (CONT.)


2.5 ADJUST MOUNTING CLIP (OPTIONAL)

Angle mounting clip into desired position.

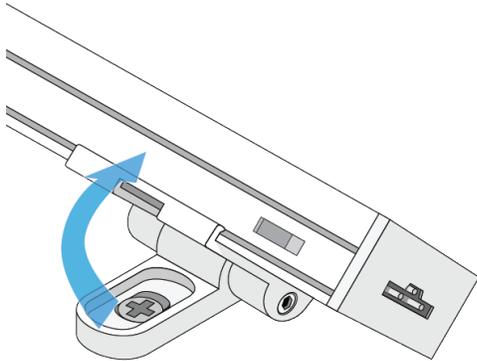

2.6 FASTEN MOUNTING CLIP


Tighten mounting clip screws using Allen wrench.

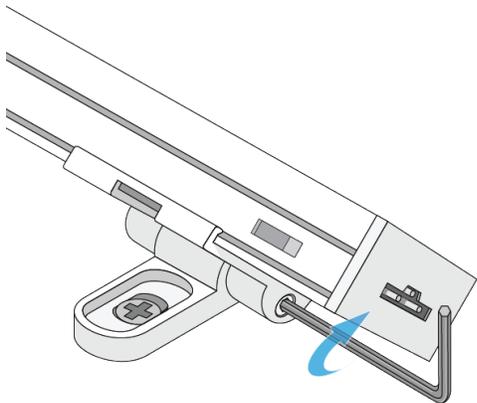

3 CONNECTING FIXTURES TOGETHER LINKABLE END-TO-END CONNECTOR


Use interconnect clip to physically join the fixtures together from the underside.

Note: Reference end-to-end connector input and output

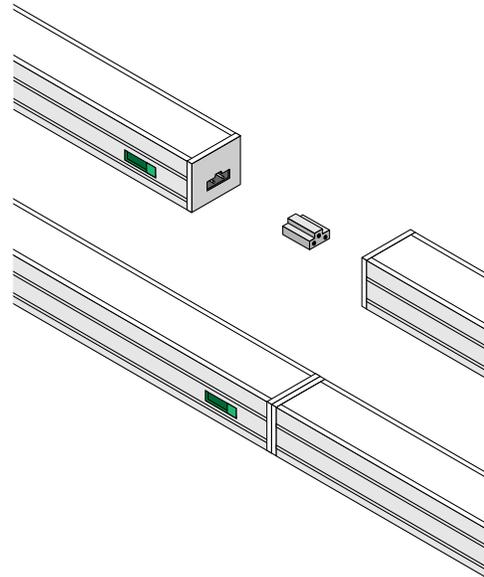

4 a CONNECT TO POWER (PLUG-IN)

Connect power cable with AC plug into 120VAC receptacle.

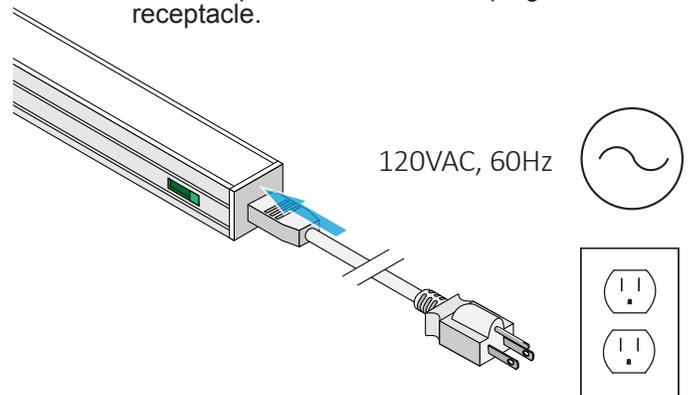



COVE 120V Cove and Task Light

INSTALLATION GUIDE


INSTALLATION (CONT.)

4 b) CONNECT TO POWER (HARD WIRE)


Insert plug into junction box, then using twist-on wire connection, connect wiring within DI-COVE-HW-JBOX Junction Box.

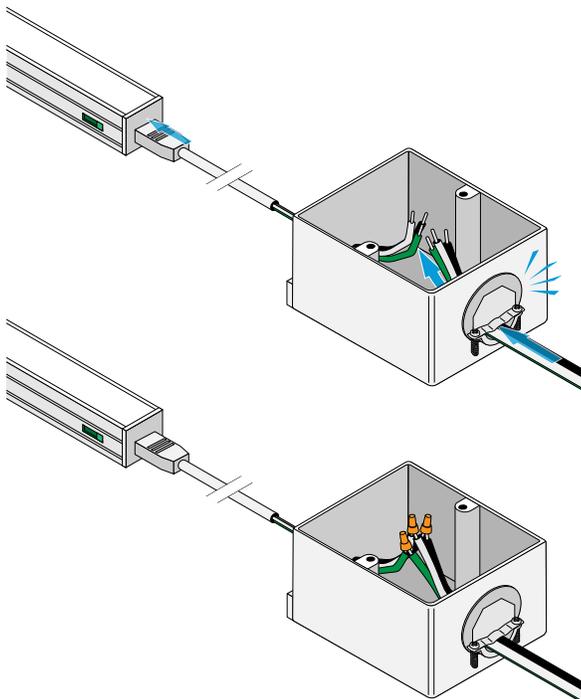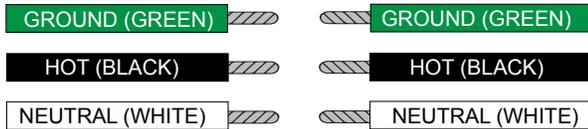

Using Phillips head screwdriver, fasten top to junction box.


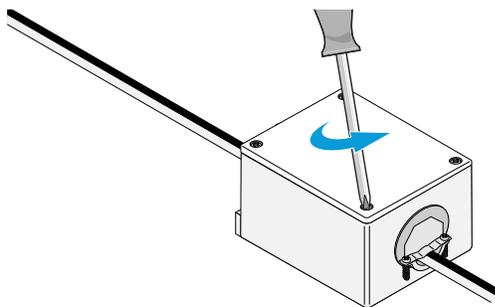


5) TURN POWER ON AT CIRCUIT BREAKER

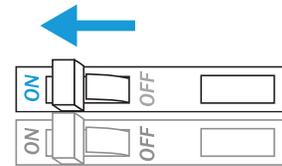

OPERATION

Using switch on side of fixture, select desired color temperature.

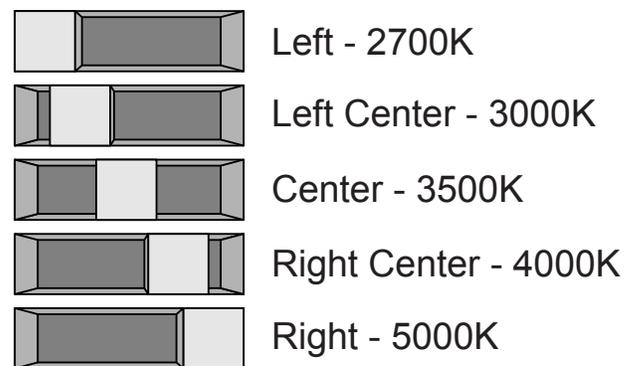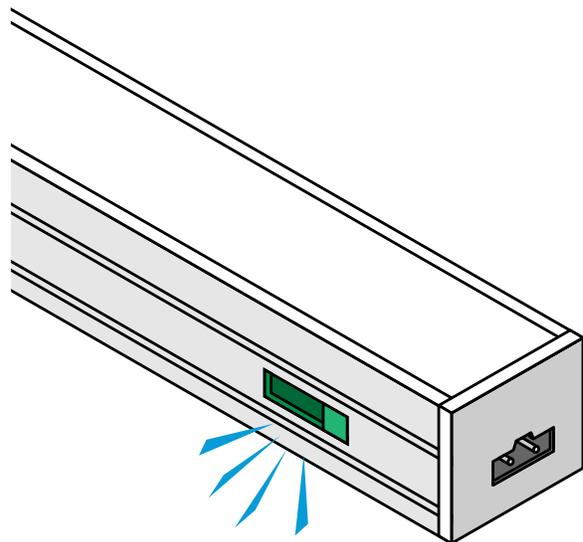

diodeled®

Toll Free: 877.817.6028 | Fax: 415.592.1596 | www.DiodeLED.com | info@DiodeLED.com
© 2023 Elemental LED, Inc. All rights reserved. Specifications are subject to change without notice.