

LM-79 Test Report

Relevant Standards

IES LM-79-2008
IES TM-30-2015
CIE 13.3-1995
IESNA TM-15-11
CIE 117:1995

Product SKU

LINAIRE® Flex Top Bend Linear Light
DI-24V-TE-LIN3-35

Test Conditions

Test Temperature: 26.5 °C
Luminaire Sample Length: 1000 mm.
Power Supply: Agilent E3634A DC Power Supply
Voltage: 24.0 VDC
Current: 0.612 A
Power Consumption: 14.7 W

Test Date


4/16/2025

Color Details


Correlated Color Temperature	CCT = 3372
CIE Test Color Method General Index	CRI = 92.1
CIE Test Color Method Sample Nine Score	R9 = 57.0
IES TM-30-15 Fidelity Index	R _f = 90.0
IES TM-30-15 Gamut Index	R _g = 98.6
Luminous Flux	Lm = 1262

Color coordinates CIE 1931	(x;y) = (0.415;0.399)
Color coordinate CIEs 1960	(u;v) = (0.238;0.344)
Color coordinate CIEs 1976	(u';v') = (0.238;0.516)
Color deviation from BBL	Duv = 0.0017
Color Quality Scale (CQS)	CQS = 90.9


CIE 1931

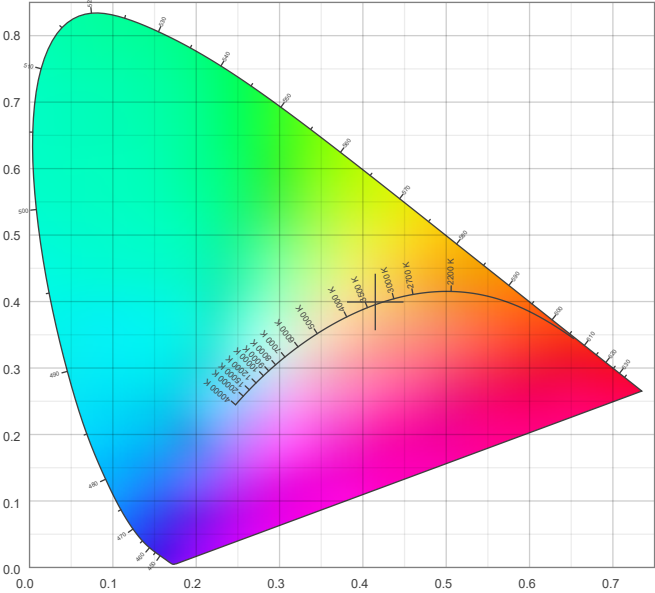

CIE 1931 – zoomed on Planckian locus

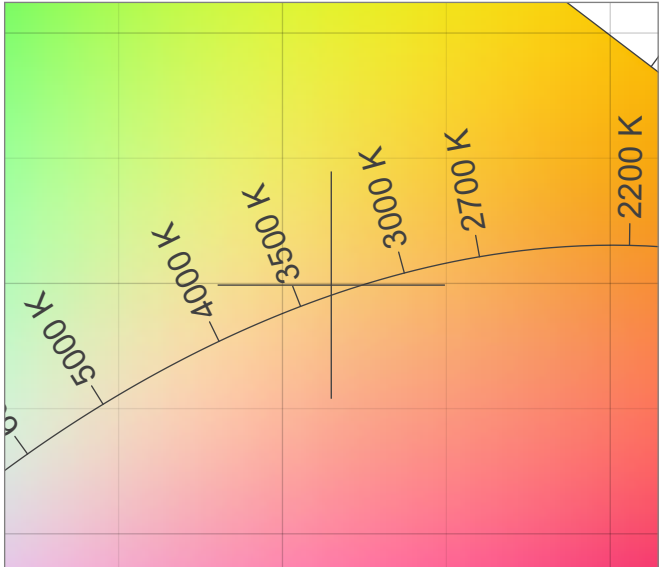


Color Rendering Index per Reference Color (CIE 1995)

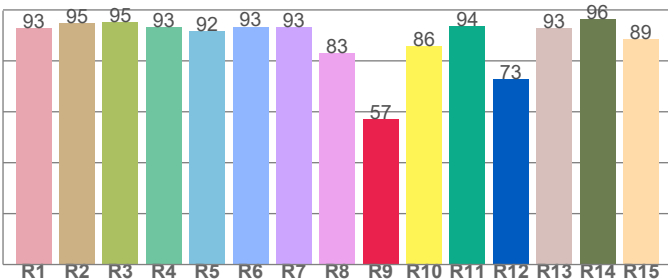


CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92.8	94.7	95.2	93.3	91.6	93.5	93.1	83.0	57.0	85.7	93.7	72.7	92.9	96.3	88.6

Spectral Power Distribution (SPD) / W/nm – 0-100%

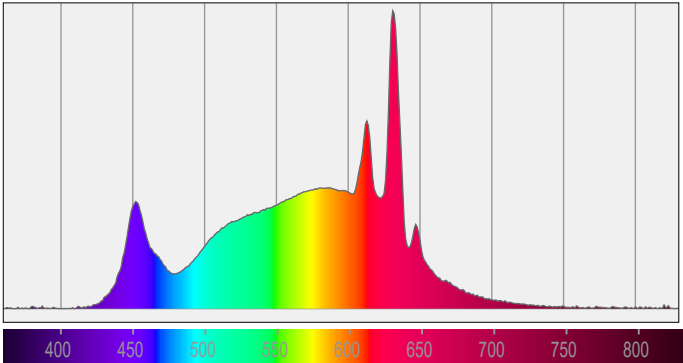


TM30-18 Rf-Values per Hue Bin

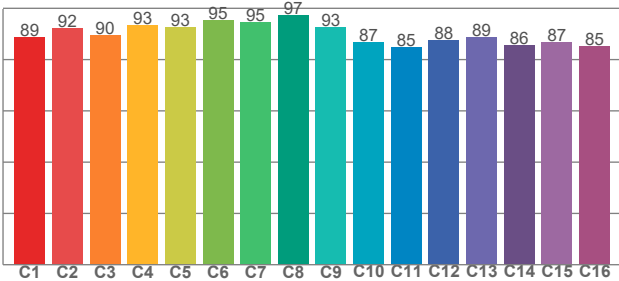

TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
88.8	92.1	89.6	93.4	92.6	95.4	94.5	97.2	92.6	86.6	84.8	87.7	88.7	85.5	86.8	85.3

Color Quality Scale by Reference Color

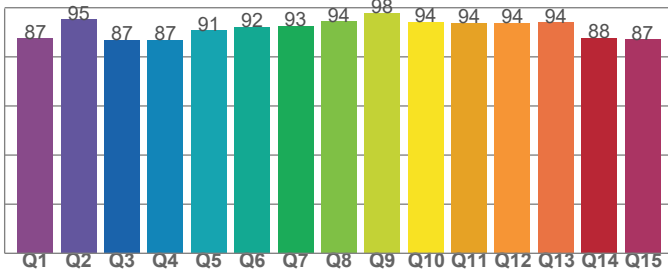

CQS Q values






Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
87.4	95.2	86.9	86.7	90.7	92.1	92.5	94.4	97.9	94.2	93.7	93.8	93.9	87.6	87.1




Rf 90.0
Fidelity index Rf

Rg 98.6
Gamut index Rg

Hue Bin	R _f	Shifts (%)	
		Chroma	Hue
1	89	-6%	0%
2	92	-4%	2%
3	90	-2%	5%
4	93	-2%	2%
5	93	-3%	3%
6	95	1%	1%
7	95	-2%	0%
8	97	-1%	0%
9	93	-2%	4%
10	87	-2%	9%
11	85	2%	9%
12	88	7%	0%
13	89	3%	-7%
14	86	5%	-10%
15	87	-1%	-9%
16	85	-3%	-8%

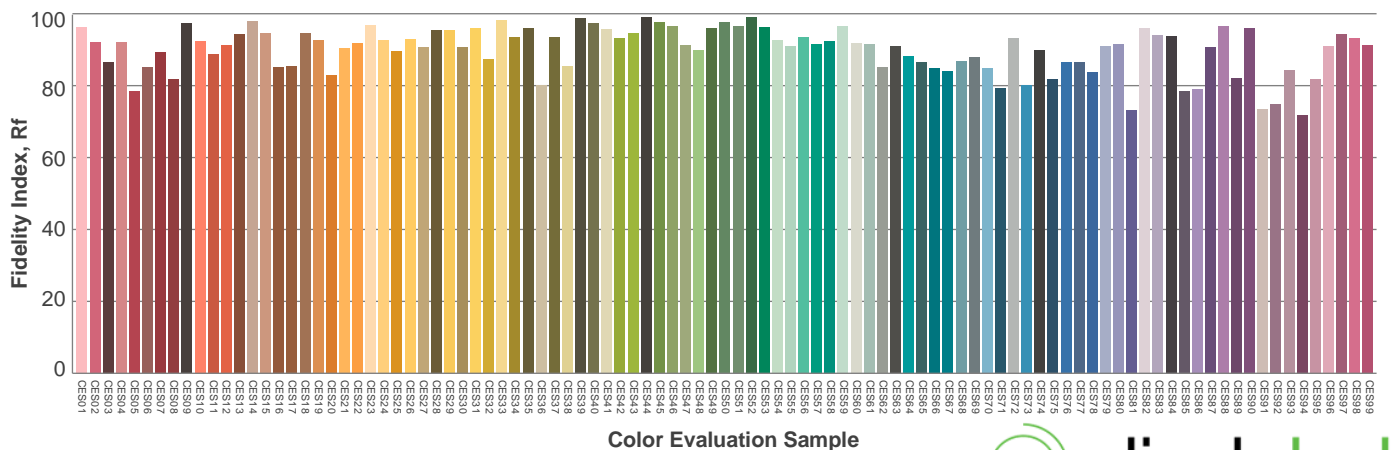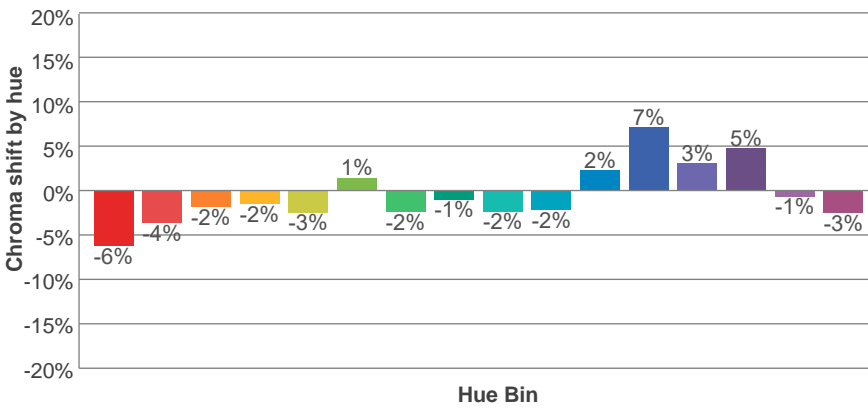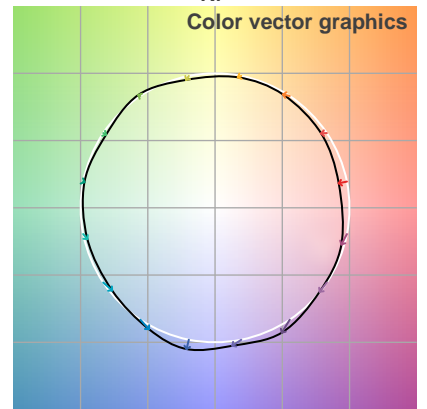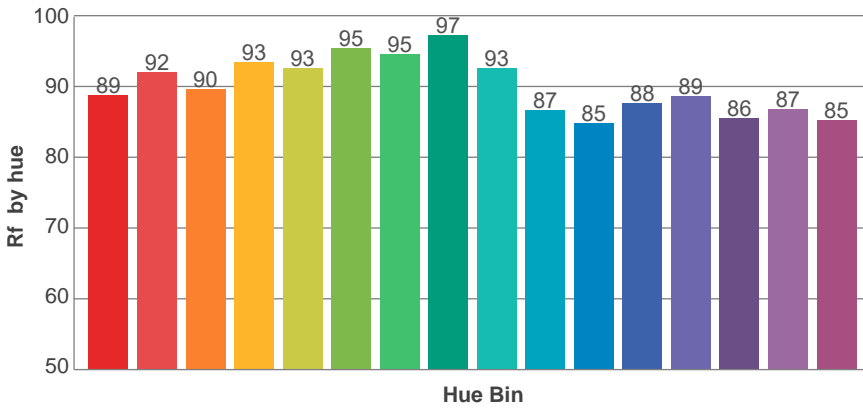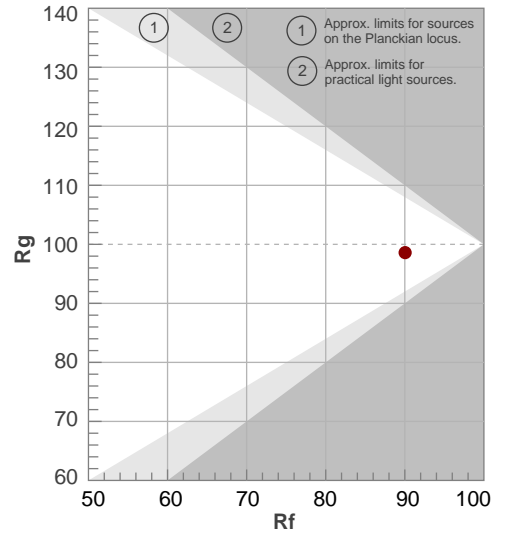

Beam Details

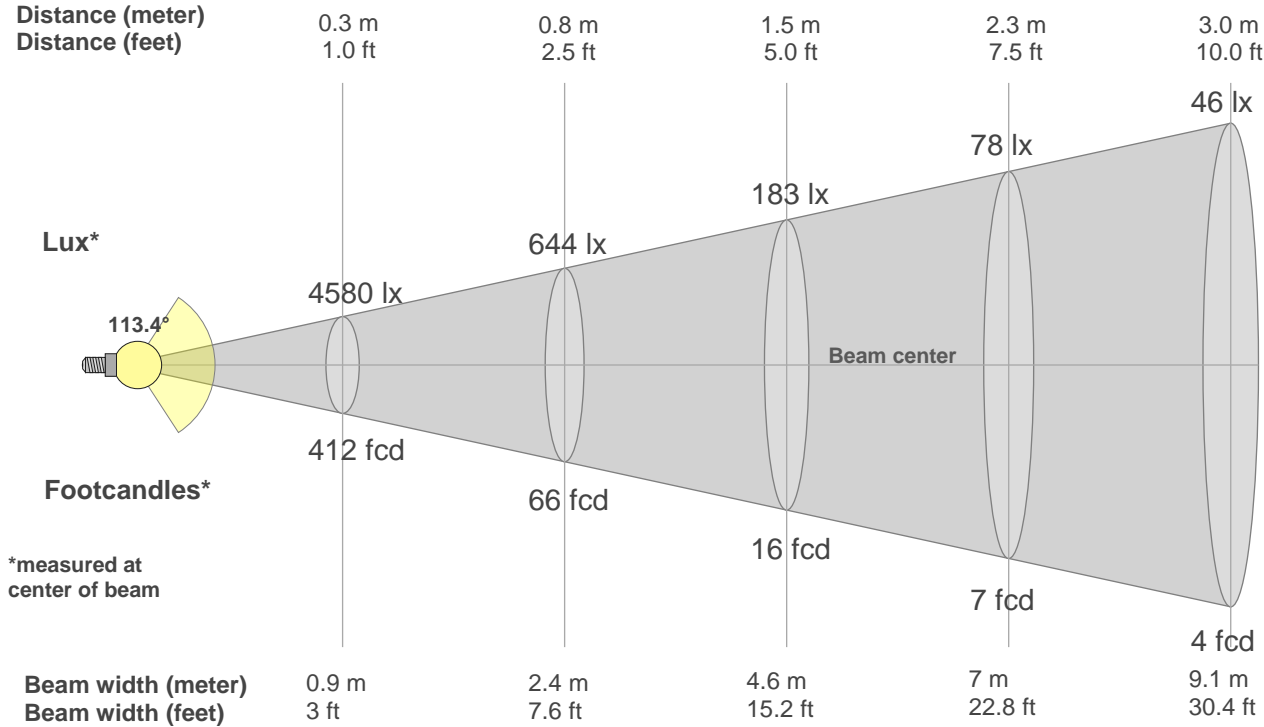

Beam Intensities from 1-20m

1m	2m	3m	4m	5m	6m	7m	8m	9m	10m	11m	12m	13m	14m	15m	16m	17m	18m	19m	20m
3.3ft	6.6ft	9.8ft	13.1ft	16.4ft	19.7ft	23ft	26.2ft	29.5ft	32.8ft	36.1ft	39.4ft	42.7ft	45.9ft	49.2ft	52.5ft	55.8ft	59.1ft	62.3ft	65.6ft
412lx	103lx	46lx	26lx	16lx	11lx	8lx	6lx	5lx	4lx	3lx	3lx	2lx	2lx	2lx	2lx	1lx	1lx	1lx	1lx
38.3fcd	9.6fcd	4.3fcd	2.4fcd	1.5fcd	1.1fcd	0.8fcd	0.6fcd	0.5fcd	0.4fcd	0.3fcd	0.3fcd	0.2fcd	0.2fcd	0.2fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd	0.1fcd

Intensities in 0° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
412	411	405	396	382	366	347	325	300	274	246	216	186	155	124	93	63	36	16	7
100%	100%	98%	96%	93%	89%	84%	79%	73%	66%	60%	52%	45%	38%	30%	23%	15%	9%	4%	2%

Intensities in 90° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
412	410	405	396	383	367	347	325	301	274	246	218	189	158	126	95	63	33	9	6
100%	100%	98%	96%	93%	89%	84%	79%	73%	67%	60%	53%	46%	38%	31%	23%	15%	8%	2%	1%

Intensities in 180° c-plane

0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
412	411	405	396	382	366	347	325	300	274	246	216	186	155	124	93	63	36	16	7
100%	100%	98%	96%	93%	89%	84%	79%	73%	66%	60%	52%	45%	38%	30%	23%	15%	9%	4%	2%

Intensities in 270° c-plane


0°	5°	10°	15°	20°	25°	30°	35°	40°	45°	50°	55°	60°	65°	70°	75°	80°	85°	90°	95°
412	410	405	396	383	367	347	325	301	274	246	218	189	158	126	95	63	33	9	6
100%	100%	98%	96%	93%	89%	84%	79%	73%	67%	60%	53%	46%	38%	31%	23%	15%	8%	2%	1%

Beam angle 50%	Field angle 10%	Cutoff angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
113.8°	167.6°	183.8°	73.6%	49.9%



Luminous Intensity Diagram

Unit: 0-100% of peak intensity

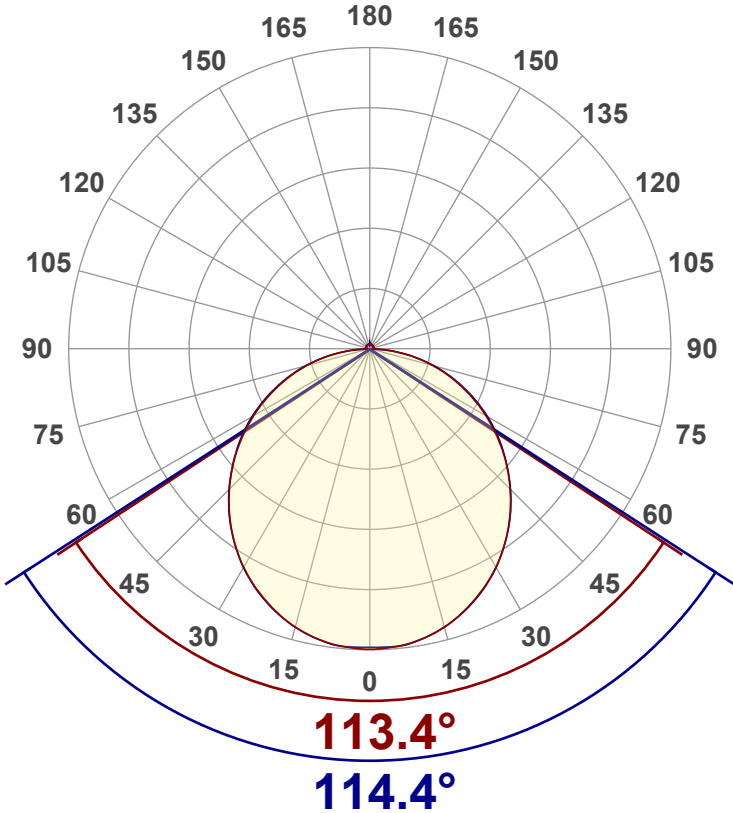

Main Values

Output (Total Lumen)	1262 lm
Lumen Up% / Down%	3.08% / 96.92%
Peak Intensity	413 cd
Beam Angle (50%)	113.8°
Beam Angle (90%)	114.4°
Beam Angle (10%)	113.4°

Cut-off Angle

Average 2,5%	183.8°
--------------	--------

Field Angle

Average 10%	167.6°
-------------	--------

Intensity Ratio

In 120° cone	73.6%
In 90° cone	49.9%

C000-C180 C090-C270

Zonal Lumen Summary

0°-10°	10°-20°	20°-30°	30°-40°	40°-50°	50°-60°	60°-70°	70°-80°	80°-90°
39.0 lm	112 lm	169 lm	204 lm	212 lm	194 lm	155 lm	99.8 lm	39.1 lm
90°-100°	100°-110°	110°-120°	120°-130°	130°-140°	140°-150°	150°-160°	160°-170°	170°-180°
8.28 lm	5.60 lm	5.43 lm	5.13 lm	4.70 lm	3.96 lm	3.09 lm	1.96 lm	0.679 lm



LCS Table

BUG rating:	B1 U2 G1	
Forward light	Lumens	Lumens %
Low(0-30):	159.7	12.7%
Medium(30-60):	304.7	24.1%
High(60-80):	127.3	10.1%
Very high(80-90):	19.7	1.6%
Back light		
Low(0-30):	159.7	12.7%
Medium(30-60):	304.7	24.1%
High(60-80):	127.3	10.1%
Very high(80-90):	19.7	1.6%
Uplight		
Low(90-100):	8.6	0.7%
High(100-180):	30.5	2.4%

LCS Graph

