


BROADWAVE® LED WALL WASHER (HARD-WIRE)

SPECIFICATION SHEET

- Extruded aluminum body & tempered glass
- IP 65 wet/outdoor
- 150° rotary angle
- Wall and ceiling mountable
- DMX-512 controllable

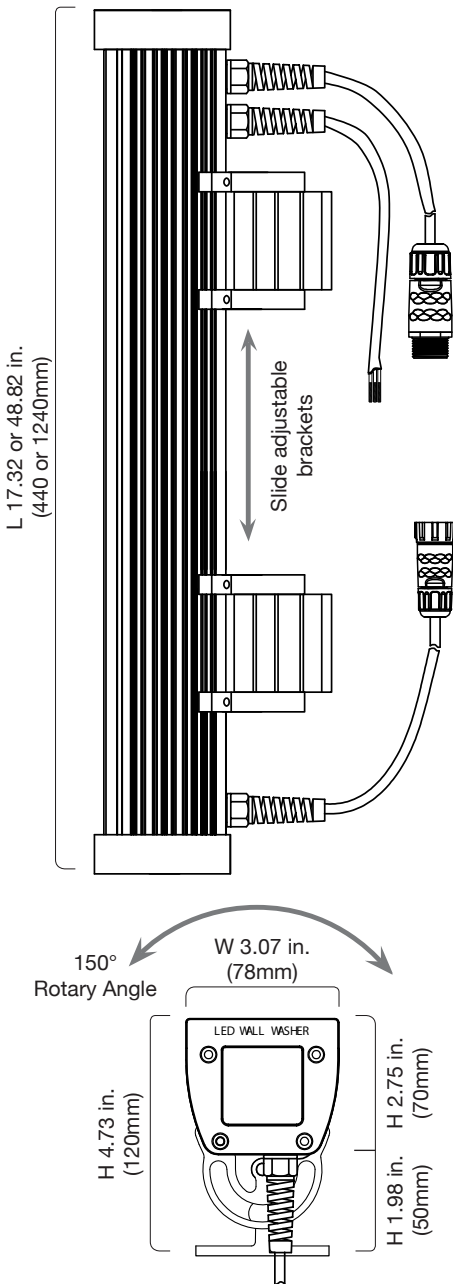

SPECIFICATIONS

Input ¹: 100-240VAC, 50/60Hz
Power Connection: 1015 Wire, 16AWG, 600V, 105°C, WW-1
Operating Voltage: 24V DC
Power Consumption: 24.5W(18 in.), 48.5W(49 in.)
LED Chip Type: Edison
LED Chip Beam Angle: 45°
CRI: 70 (6000K)
Mounting ²: (2x) integrated 150° surface-mount brackets. Each bracket has (2x) 5/16 in. mounting holes. Wall & ceiling mountable
Maximum Run: 10 fixtures (expandable with use of 8-Way DMX Splitter)
Connections: 1ea. male/female wet location 3-pin M14 cables (15 in. length). M14-to-XLR-3

adapter cables also included
Dimmable ³: May be dimmed/controlled using on-board controls or with a compatible DMX-512 controller
Ambient Temp ⁴: -4° ~ 104° F (-20° ~ 40° C)
Operating Temp ⁵: -4° ~ 131° F (-20° ~ 55° C)
Housing / Cooling: Extruded aluminum casing; tempered glass / cooling by free air convection
Environment ⁶: IP65 wet/outdoor
Dimensions: 17.32 x 3.07 x 4.73 in. (L x W x H) 48.82 x 3.07 x 4.73 in. (L x W x H)
Weight: 5.07 lbs.(18 in.), 13.01 lbs.(49 in.)
Certifications: ETL Listed Hard-Wire Luminaire. Conforms to ANSI/UL Std. 1598. Certified to CAN/CSA Standard CSA C22.2 No.250.0

Item #	CCT (Kelvin)	Lumens ⁷	LED Chips	Efficacy (lm/W)
DI-0454-ETL (49 in.)	6000K	2318	36	47.8
DI-0450-ETL (49 in.)	RGB	1203	R=12, B=12, G=12	24.8


- Note** ¹ Only ETL Listed for connection with a 120VAC, 15- or 20-ampere branch circuit.
Note ² When mounting to walls and ceilings, use applicable lag bolts and consider the strength of these surfaces versus the weight of the fixture.
Note ³ Not compatible with standard High Voltage AC dimming controls.
Note ⁴ Do not install product in an environment outside the listed ambient temperature. Ensure adequate airflow and heatsinking is considered when mounting/installing. Exceeding the maximum ambient temperature may damage LED chips by reducing the total lamp life, lumen output, and/or adversely impact color consistency.
Note ⁵ Operating temperature is measured according to the minimum and maximum ambient temperature environment.
Note ⁶ When installing outdoors or in a damp location, ensure water-resistant end caps are connected to all wet location 3-pin M14 cables. If attaching XLR-3 DMX adapter cables seal all standard XLR-3 connections with 1.25" heat shrink and finish with waterproof tape (not included). Do not use liquid sealants of any kind.
Note ⁷ Lumen value measured in accordance to IES LM-79-08. LED chips have a luminous flux range with a tolerance of +/- 5%.

Item #:	Project:
---------	----------

49 in. BROADWAVE 6000K

DI-0454-ETL

POLAR CANDELA DISTRIBUTION GRAPH

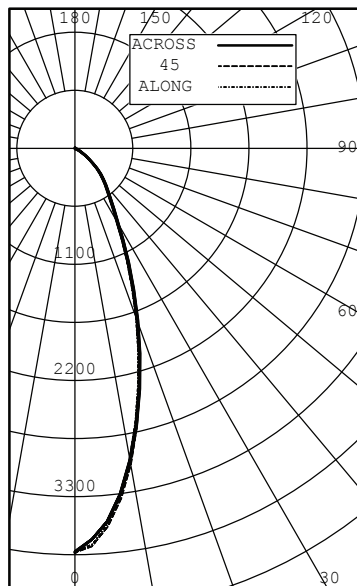

INTENSITY (CANDLEPOWER) SUMMARY

ANGLE	BEAM SIDE			
	ALONG	22.5	45	67.5 ACROSS
0	3825	3825	3825	3825
5	3572	3600	3598	3621
10	2992	3026	3042	3071
15	2316	2339	2357	2399
20	1691	1696	1706	1751
25	1159	1167	1174	1204
30	791	796	805	816
35	587	588	595	596
40	455	452	460	458
45	346	342	351	342
50	230	225	232	233
55	125	122	126	128
60	62	61	62	64
65	32	31	32	31
70	16	16	16	16
75	7	7	7	7
80	2	2	2	2
85	0	0	0	0
90	0	0	0	0

ZONAL LUMENS AND PERCENTAGES

ZONE	LUMENS	% LUMINAIRE
0-30	1520	65.56
0-40	1895	81.73
0-60	2276	98.19
0-90	2318	100.00
40-90	423	18.27
60-90	42	1.81
90-180	0	0.00
0-180	2318	100.00


Cone Of Light Tabulation

Mounting Height (Feet)	Footcandles at Nadir	Diameter (Feet)
4.00	240	2.37
6.00	106	3.55
8.00	59.9	4.73
10.0	38.3	5.92
12.0	26.6	7.10
14.0	19.6	8.29
16.0	15.0	9.47

49 in. BROADWAVE RGB

DI-0450-ETL

POLAR CANDELA DISTRIBUTION GRAPH

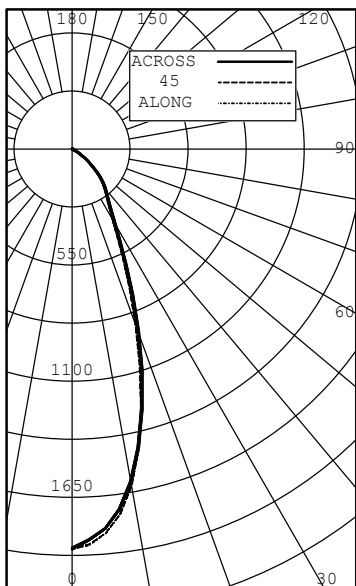

INTENSITY (CANDLEPOWER) SUMMARY

ANGLE	BEAM SIDE			
	ALONG	22.5	45	67.5 ACROSS
0	1892	1892	1892	1892
5	1829	1832	1827	1843
10	1618	1622	1620	1636
15	1269	1265	1262	1297
20	889	884	876	915
25	571	573	574	597
30	382	385	389	399
35	297	297	296	297
40	244	242	242	241
45	190	187	189	189
50	126	123	125	126
55	68	66	68	69
60	33	32	33	34
65	16	15	15	16
70	7	7	7	7
75	2	2	2	2
80	0	0	0	0
85	0	0	0	0
90	0	0	0	0

ZONAL LUMENS AND PERCENTAGES

ZONE	LUMENS	% LUMINAIRE
0-30	788	65.50
0-40	977	81.21
0-60	1184	98.40
0-90	1203	100.00
40-90	226	18.79
60-90	19	1.60
90-180	0	0.00
0-180	1203	100.00











Cone Of Light Tabulation

Mounting Height (Feet)	Footcandles at Nadir	Diameter (Feet)
4.00	118	2.50
6.00	52.6	3.75
8.00	29.6	5.00
10.0	18.9	6.25
12.0	13.2	7.51
14.0	9.66	8.76
16.0	7.40	10.0

* Photometric data complies with LM-79-08, ANSI C82.77-02.

DMX ACCESSORIES

The following DMX Accessories may be utilized with our DMX fixtures and controllers.



Item #	Type	Description	Image
DI-1918	DMX 4-Channel Decoder	Pair with a DMX controller to control solid color, RGB, and RGBW LED fixtures. Features a digital display for easy addressing.	
DI-0820 (female) DI-0821 (male)	Wireless DMX Transmitter/Receiver	Wirelessly connects DMX devices: Fixture to fixture, fixture to controller, and decoder to decoder. Features XLR-3 connections.	
DI-1804	DMX 8-Way Splitter	Amplifies and splits a DMX signal up to 8 ways. Features 1x male XLR-3 input connection, and 8x female XLR-3 output connections.	
DI-1803	DMX XLR-3 Connector Pair	Utilize this XLR-3 connector pair to create custom length DMX extensions. Sold by the pair (male/female). Male: 2.8 x .71 in. (L x Dia.). Female: 2.4 x .71 in. (L x Dia.)	
DI-1806	XLR-3 to RJ45 Adapter Connector Pair	Converts RJ45 data cables to XLR-3 DMX connections. Sold by the pair (male/female) Male & Female: 2.58 x .87 x .98 in. (L x W x H)	
DI-1809	20 ft. DMX XLR-3 Extension Cable	Creates an extension between DMX fixtures and accessories. Features XLR-3 connections. Wire: 18/3 AWG. Male connection: 2.8 x .71 in. (L x Dia.) Female: 2.4 x .71 in. (L x Dia.)	
DI-1807	RJ45 Coupler	Female-to-female accessory quickly connects two RJ45 accessories. Dimensions: 1.22 x .44 x .87 in. (L x W x H)	
DI-1805	RJ45 Splice Cable	Lead wires connect to wall-mount DMX controllers while RJ45 plug connects to DMX accessories. Dimensions: 6.5 x .4 x .6 (L x W x H)	
DI-1811	XLR-3 to RJ45 Adapter Cable Pair	Converts RJ45 port of 4-Channel DMX Decoder to a standard XLR-3 connection. Sold by the pair (male/female). Dimensions: 20 x .71 (L x Dia)	
DI-1911	RJ45 Extension Cable	Creates a 10 ft. extension between DMX fixtures and accessories utilizing RJ45 connections.	

Note: accessories sold separately

DMX CONTROLS

For a list of compatible controls see the product page at www.DiodeLED.com.

MOUNTING

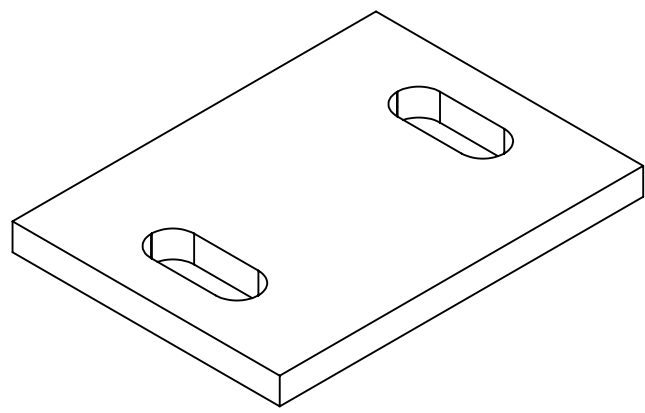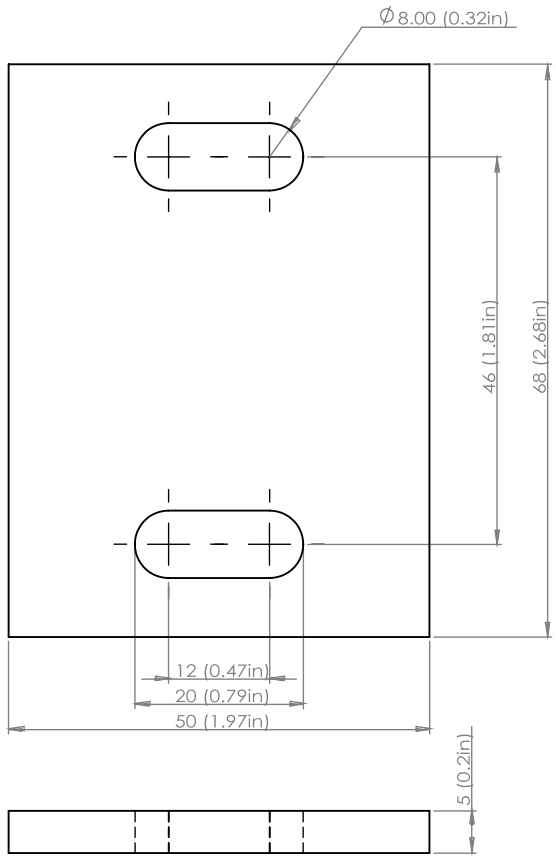

ADDITIONAL RESOURCES

Visit the online product page at www.DiodeLED.com for additional resources including:

- **WET LOCATION LED WALL WASHER Installation Guide**
For system diagrams and full installation instructions.
- **Voltage Drop Charts**
Use to specify appropriate wire gauge for installation. Available at the 'Tools & Resources' page at www.DiodeLED.com.

SAFETY & DISCLOSURES

- Install in accordance with the National Electric Code and local regulations.
- This product is intended to be installed and serviced by a qualified, licensed electrician.
- Do not disassemble or modify this product. Doing so will void your warranty.
- This fixture is not compatible with any traditional dimming controls. Wall washers can only be controlled/dimmed with the on-board interface or with an external DMX controller. Please contact customer service for additional information.
- Ensure all adjusting screws on mounting brackets and fixtures are properly secured prior to permanent installation.
- When mounting to walls and ceilings, use applicable lag bolts and consider the strength of these surfaces versus the weight of the fixture.
- It is recommended to power this fixture by a GFCI protected circuit.
- This fixture is IP65 rated.
- When installing outdoors or in a wet location, ensure water-resistant end caps are connected to all exposed wet location 3-pin M14 connections. If attaching XLR-3 adapter cables seal all XLR-3 DMX connections with 1.25" wide heat shrink and finish with waterproof tape (not included). Do not use liquid sealants of any kind.
- This fixture is not to be used in or around chlorinated, treated or salt water due to the corrosive and degrading qualities of chlorine, saline, and other chemicals on the fixture components. Keep at least 16 feet away from pools and spas.
- Do not install product in an environment outside the listed ambient temperature. Ensure adequate airflow and heatsinking is considered when mounting/installing.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment. Exceeding the maximum ambient temperature may damage LED chips by reducing the total lamp life, lumen output, and/or adversely impact color consistency.
- Ensure adequate airflow and heatsinking is considered when mounting/installing. Exceeding the maximum operating temperature may damage LED chips by reducing the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
- Lighting technology has some amount of gradual light degradation (output and/or color) over the lifespan of the products. Diode LED products are designed to minimize degradation, but some light degradation and color shift is a normal part of the life span of any LED lighting system.
- We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

WARRANTY INFORMATION

Limited Warranty

This LED fixture has a two (2) year limited warranty from the date of shipment. This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at www.DiodeLED.com under the 'Tools & Resources' tab. For warranty related questions, please contact customer service.

Consumer's Acknowledgment

Diode LED stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and in-field adjustments can have a significant impact on an entire system. Choosing the right components is essential. Diode LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Diode LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Diode LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgement that the products purchased are designed and configured correctly. The purchaser agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Diode LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Diode LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Diode LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.



Toll Free: 877.817.6028 | Fax: 415.592.1596 | www.DiodeLED.com | info@DiodeLED.com
© 2017 Elemental LED, Inc. All rights reserved. Specifications are subject to change without notice.