

### EMERY™ RECESSED 24V Linear Lighting Fixture


A flanged, recessable fixture for millwork or in-wall applications.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



| FEATURES   | MECHANICAL DIAGRAM |
|--|--------------------|
| <ul style="list-style-type: none"> <li>Flanged profile for clean, recessed mounting</li> <li>Assembled in the USA</li> <li>Multiple output options</li> <li>IP20 (Indoor / Damp Location)</li> <li>Closet rated</li> <li>SS: 12 Year Warranty / VE &amp; STD: 7 Year Warranty</li> </ul> |                    |

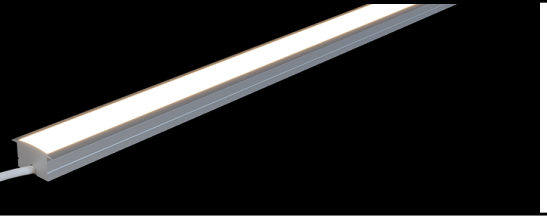

### ORDERING CODES

Order customized fixture

Options 1-8 & 14 are required to create a fixture.

Options 9 - 13 are not required to create a fixture.

| 1       | 2      | 3      | 4           | 5     | 6   | 7    | 8              | 9               | 10                | 11                                  | 12                 | 13                                   | 14       |
|---------|--------|--------|-------------|-------|-----|------|----------------|-----------------|-------------------|-------------------------------------|--------------------|--------------------------------------|----------|
| Product | Finish | Rating | Performance | W/ft. | CCT | Lens | Fixture Length | Exact / Optimal | Input Wire Length | Input Wire Color, Type & Connection | Output Wire Length | Output Wire Color, Type & Connection | Mounting |
| DI      |        |        |             |       |     |      |                |                 |                   |                                     |                    |                                      |          |

**1 PRODUCT**  
 EMERY-REC  
 (EMERY™ RECESSED)

**2 FINISH**  
 AL  
 (Aluminum)

**3 RATING**  
 DRY  
 (Indoor / Damp Location)

**4 PERFORMANCE**  

|               |     |            |
|---------------|-----|------------|
| <b>SS</b>     |     |            |
| CRI: 95+      | 1   | 24 (2400K) |
| R9: 90+       | 1.9 | 40 (4000K) |
| Fidelity: 103 | 2.7 | 50 (5000K) |
| Gamut: 95     | 2.8 | 63 (6300K) |
|               | 4.6 | 30 (3000K) |
|               | 7.2 | 63 (6300K) |
|               |     | 35 (3500K) |

**5 W/FT.**  

|      |            |            |
|------|------------|------------|
| 0.9  | 24 (2400K) | 40 (4000K) |
| 1.72 | 27 (2700K) | 50 (5000K) |
| 2.55 | 30 (3000K) | 63 (6300K) |
| 4.28 | 35 (3500K) |            |

**6 CCT**  

|            |            |
|------------|------------|
| 24 (2400K) | 40 (4000K) |
| 27 (2700K) | 50 (5000K) |
| 30 (3000K) | 63 (6300K) |
| 35 (3500K) |            |

**7 LENS**  
 FR  
 (Frosted)

**8 FIXTURE LENGTH**  
 \_\_\_ in.  
*Fixture length min 6 in., max 96.25 in. (including end caps)*

**9 EXACT / OPTIMAL**  

|                          |
|--------------------------|
| O<br>(Optimal - Default) |
| E<br>(Exact)             |

**10 INPUT WIRE LENGTH**  

|                          |
|--------------------------|
| 96<br>(96 in. - Default) |
| ___ in.                  |
| ___ cm.                  |
| ___ ft.                  |
| ___ m.                   |

*Maximum wire length:  
240 in. 609.6 cm.  
20 ft. 6.09 m.*

**11 INPUT WIRE COLOR, TYPE & CONNECTION**  

| COLOR & TYPE                           | INPUT                     | CONNECTION                 |
|--|---------------------------|----------------------------|
| AW<br>(White CL2 - Default)            | A<br>(Straight - Default) | 1<br>(Bare Wire - Default) |
| AB<br>(Black CL2)                      |                           | 2<br>(Barrel)              |
| AS<br>(Silver Plenum - Bare Lead only) |                           | 3<br>(Interconnect)        |

**12 OUTPUT WIRE LENGTH**  

|                                |
|--------------------------------|
| *blank*<br>(No Wire - Default) |
| ___ in.                        |
| ___ cm.                        |
| ___ ft.                        |
| ___ m.                         |

*Maximum wire length:  
240 in. 609.6 cm.  
20 ft. 6.09 m.*

**13 OUTPUT WIRE COLOR, TYPE & CONNECTION**  

| COLOR & TYPE                           | OUTPUT                         | CONNECTION                     |
|--|--------------------------------|--------------------------------|
| *blank*<br>(No Wire - Default)         | *blank*<br>(No Wire - Default) | *blank*<br>(No Wire - Default) |
| BW<br>(White CL2)                      | A<br>(Straight)                | 1<br>(Bare Wire)               |
| BB<br>(Black CL2)                      |                                | 2<br>(Barrel)                  |
| BS<br>(Silver Plenum - Bare Lead only) |                                | 3<br>(Interconnect)            |

**14 MOUNTING**  
 MC  
 (Mounting Clip)

\* Some wattages may not be available with certain CCTs. Reference Performance Chart on page 2.

Specification Sheet | EMERY™ RECESSED Linear Lighting Fixture | SS6252025 | V4.6  
1 of 5

## EMERY™ RECESSED 24V Linear Lighting Fixture

A flanged, recessable fixture for millwork or in-wall applications.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### SS Performance

| Wattage   | CCT   | Frosted |
|-----------|-------|---------|
| 1 W/ft.   | 2400K | 83      |
|           | 2700K | 81      |
|           | 3000K | 85      |
|           | 3500K | 86      |
|           | 4000K | 90      |
|           | 5000K | 93      |
|           | 6300K | 90      |
| 1.9 W/ft. | 2400K | 155     |
|           | 2700K | 166     |
|           | 3000K | 174     |
|           | 3500K | 174     |
|           | 4000K | 182     |
|           | 5000K | 194     |
|           | 6300K | 195     |
| 2.8 W/ft. | 2400K | 239     |
|           | 2700K | 249     |
|           | 3000K | 258     |
|           | 3500K | 262     |
|           | 4000K | 274     |
|           | 5000K | 292     |
|           | 6300K | 290     |
| 4.6 W/ft. | 2400K | 375     |
|           | 2700K | 396     |
|           | 3000K | 446     |
|           | 3500K | 469     |
|           | 4000K | 427     |
|           | 5000K | 474     |
|           | 6300K | 462     |
| 7.2 W/ft. | 2400K | 584     |
|           | 2700K | 626     |
|           | 3000K | 682     |
|           | 3500K | 725     |
|           | 4000K | 645     |
|           | 5000K | 672     |
|           | 6300K | 739     |

### STD Performance

| Wattage    | CCT   | Frosted |
|------------|-------|---------|
| 0.9 W/ft.  | 2400K | 82      |
|            | 2700K | 92      |
|            | 3000K | 86      |
|            | 3500K | 88      |
|            | 4000K | 86      |
|            | 5000K | 82      |
|            | 6300K | 87      |
| 1.72 W/ft. | 2400K | 165     |
|            | 2700K | 177     |
|            | 3000K | 178     |
|            | 3500K | 165     |
|            | 4000K | 167     |
|            | 5000K | 164     |
|            | 6300K | 166     |
| 2.55 W/ft. | 2400K | 245     |
|            | 2700K | 260     |
|            | 3000K | 263     |
|            | 3500K | 238     |
|            | 4000K | 250     |
|            | 5000K | 241     |
|            | 6300K | 244     |
| 4.28 W/ft. | 2400K | 405     |
|            | 2700K | 431     |
|            | 3000K | 403     |
|            | 3500K | 405     |
|            | 4000K | 410     |
|            | 5000K | 404     |
|            | 6300K | 410     |

### VE Performance

| Wattage   | CCT   | Frosted |
|-----------|-------|---------|
| 3.3 W/ft. | 2400K | 200     |
|           | 2700K | 230     |
|           | 3000K | 234     |
|           | 3500K | 228     |
|           | 4000K | 258     |
|           | 5000K | 264     |
| 1.5 W/ft. | 2400K | 99      |
|           | 2700K | 103     |
|           | 3000K | 108     |
|           | 3500K | 114     |
|           | 4000K | 120     |
|           | 5000K | 122     |

**EMERY™ RECESSED 24V**  
Linear Lighting Fixture

A flanged, recessable fixture for millwork or in-wall applications.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_




**Recessed FIXTURE DIFFUSION**




**MOUNTING OPTIONS**

**Recessed Mount**



Recessed Mount Total Dimensions:  
0.49 × 1.03 in. (H x W)

**Mounting Clip**



Mounting Clip Total Dimensions:  
0.49 × 1.03 in. (H x W)

### EMERY™ RECESSED 24V

#### Linear Lighting Fixture

A flanged, recessable fixture for millwork or in-wall applications.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### RECOMMENDED 24V DRIVERS

| SKU   | INPUT VOLTAGE / FREQUENCY | OUTPUT VOLTAGE | MAXIMUM LOAD | MINIMUM LOAD    | CLASS 2 | DIMMABLE | LENGTH    | WIDTH    | HEIGHT   |
|---|---------------------------|----------------|--------------|-----------------|---------|----------|-----------|----------|----------|
| <b>OMNIDRIVE® X Dimmable Driver</b> <span style="float: right;">OMNIDRIVE® X Dimmable Driver Specification Sheet</span><br><a href="https://www.diodeled.com/custom/download/productFile/filename/omnidrive-x-specification-sheet.pdf/">https://www.diodeled.com/custom/download/productFile/filename/omnidrive-x-specification-sheet.pdf/</a><br>Versatile driver for most high-performance dimming on ELV, TRIAC, and 0-10V systems. <span style="float: right;">Contains</span><br><div style="display: flex; justify-content: space-between; font-size: small;"> <ul style="list-style-type: none"> <li>• Additional Models</li> <li>• Additional Features</li> </ul> <ul style="list-style-type: none"> <li>• Derating Curves</li> <li>• System Diagrams</li> </ul> </div>   |                           |                |              |                 |         |          |           |          |          |
| DI-ODX-24V30W-J   | 120-277V                  | 24V            | 30W          | No Minimum Load | Yes     | Yes      | 6.5 in.   | 3.7 in.  | 1.57 in. |
| DI-ODX-24V60W-J   | 120-277V                  | 24V            | 60W          | No Minimum Load | Yes     | Yes      | 7.4 in.   | 3.7 in.  | 1.57 in. |
| DI-ODX-24V96W-J   | 120-277V                  | 24V            | 96W          | No Minimum Load | Yes     | Yes      | 8.66 in.  | 3.7 in.  | 1.57 in. |
| DI-ODX-24V120W-J  | 120-277V                  | 24V            | 120W         | No Minimum Load | No      | Yes      | 8.66 in.  | 3.7 in.  | 1.57 in. |
| <b>VLM Series Constant Voltage Driver</b> <span style="float: right;">VLM Series Constant Voltage Driver Specification Sheet</span><br><a href="https://www.diodeled.com/custom/download/productFile/filename/VLM-Specification%20Sheet%20(Driver%20&amp;%20J-Box).pdf/">https://www.diodeled.com/custom/download/productFile/filename/VLM-Specification%20Sheet%20(Driver%20&amp;%20J-Box).pdf/</a><br>Compact driver for on/off, PWM dimming, and color-changing applications. <span style="float: right;">Contains</span><br><div style="display: flex; justify-content: space-between; font-size: small;"> <ul style="list-style-type: none"> <li>• Additional Models</li> <li>• Additional Features</li> </ul> <ul style="list-style-type: none"> <li>• Derating Curves</li> <li>• System Diagrams</li> </ul> </div> |                           |                |              |                 |         |          |           |          |          |
| VLM60W-24   | 120 / 277VAC<br>47 - 63Hz | 24V            | 60W          | No Minimum Load | Yes     | PWM      | 5.1 in.   | 0.75 in. | 0.77 in. |
| VLM60W-24-LPS3R   | 120 / 277VAC<br>47 - 63Hz | 24V            | 60W          | No Minimum Load | Yes     | PWM      | 10.79 in. | 7.34 in. | 2.36 in. |
| VLM100W-24  | 120 / 277VAC<br>47 - 63Hz | 24V            | 100W         | No Minimum Load | Yes     | PWM      | 5.38 in.  | 1 in.    | 0.77 in. |
| VLM100W-24-LPS3R  | 120 / 277VAC<br>47 - 63Hz | 24V            | 100W         | No Minimum Load | Yes     | PWM      | 10.79 in. | 7.34 in. | 2.36 in. |

### EMERY™ RECESSED 24V

#### Linear Lighting Fixture

A flanged, recessable fixture for millwork or in-wall applications.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



## CERTIFICATIONS

### Safety

- UL Listed 2108 Low Voltage Luminaires. Certified for United States and Canada. File # E469769.
- Approved for storage areas of clothes closets per NEC 410.16.A.3 and 410.16.C.5

### Performance

- Can be used to comply with TITLE 24 Part 6 High Efficacy Lighting LED requirements - JA8-2016-2022-E
- LED chip data measured in accordance to IES LM-80-08.
- Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Elemental LED's Innovation Lab.

### Safety / Warnings / Disclosures

1. Install in accordance with national and local electrical code regulations.
2. This product is intended to be installed and serviced by a qualified, licensed electrician.
3. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
4. Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Tape light and attached wire leads are field-cuttable.
5. Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.
6. Do not install in environment where LED chips are exposed to direct sunlight as damage to the phosphor will occur.
7. Do not install in environment where excessive heat may exist (ex. close proximity to fireplace, etc.) See Ambient Temperature ratings
8. Do not modify product beyond instructions or warranty will be void.
9. Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
10. We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

## WARRANTY

### Limited Warranty

- SS: 12 Year Warranty / VE & STD: 7 Year Warranty

This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at [www.diodeled.com/limited-warranty/](http://www.diodeled.com/limited-warranty/) within the Policies section. For warranty related questions please contact product support.

### Consumer's Acknowledgment

Elemental LED, Inc. stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Elemental LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Elemental LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Elemental LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Elemental LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Elemental LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Elemental LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.

- Lumen value measured in accordance to IES LM-80-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length. Max run may exceed Class 2 limit. Actual wattage may differ from calculated wattage due to voltage drop across run.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value can be calculated as follows: Lumen value divided by average power consumption per foot.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.