


SAFETY & WARNINGS


1. Install in accordance with national and local electrical code regulations.
2. This product is intended to be installed and serviced by a qualified, licensed electrician.
3. Do not modify product beyond instructions or warranty will be void.
4. Do not submerge, nor install within 5 feet of a swimming pool.
5. Only install with a Listed Class 2 DC LED driver.
6. To avoid a visible reduction in light output, ensure wire gauge used with LED Tape Light is sufficient to keep under 3% voltage drop.
7. Do not exceed maximum run recommended for Tape Light.
8. Failure to follow safety warnings, and installation instructions will void the warranty.

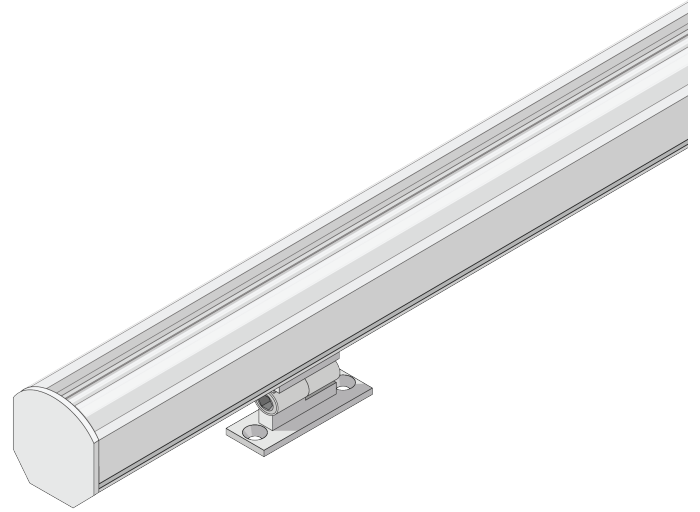


WARNING

DO NOT CONNECT DIRECTLY TO LINE VOLTAGE POWER!
Read all warnings and installation instructions thoroughly.

HANDLE WITH CARE

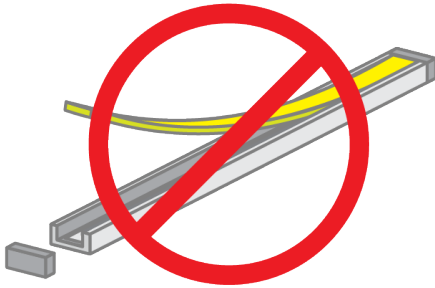


Do not modify or disassemble fixture beyond instructions.

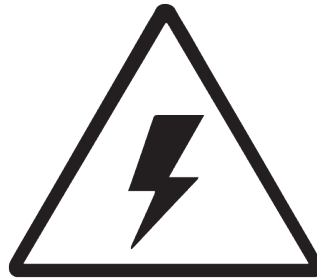

**Use only with assigned voltage.
See UL Tag.**

Pre-Installation

Note: Graze X Fixtures are available with the following connections. Ensure Class 2 power supply is compatible with connector prior to installation.

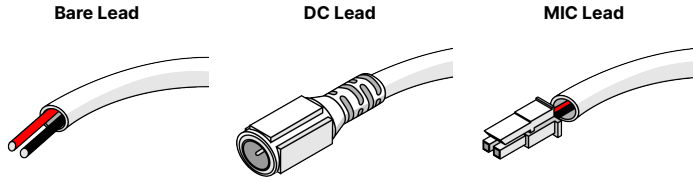

1. Turn Power Off at Circuit Breaker


Never cut wire attached to a live circuit. Do not exceed Class 2 Limit.

2. Mount GRAZE X Fixture

Note: Not every mounting option is shown below. For additional mounting options, refer to individual Channel Specification Sheets.


2.1 Mark holes. Use a minimum of one bracket or clip for every foot of channel.

Aiming Bracket **Mounting Clip**

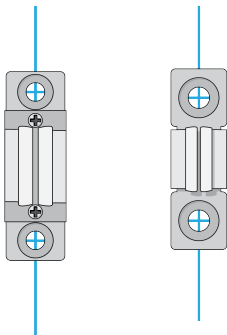

2.2 Fasten with applicable screws w/screwdriver or drill.


Aiming Bracket **Mounting Clip**



2.3 Adjust Aiming Bracket.


Aiming Bracket

- Loosen Aiming Bracket using Hex Key
- Adjust angle in 15° increments up to 90°
- Tighten Aiming Bracket using Hex Key

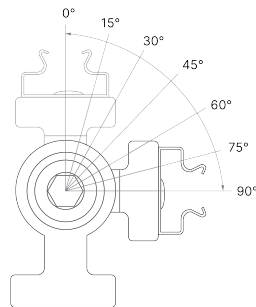


2.4 Secure Graze X to bracket or clip.

Aiming Bracket

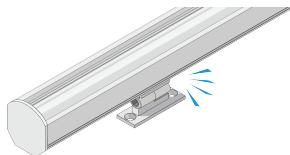


Mounting Clip

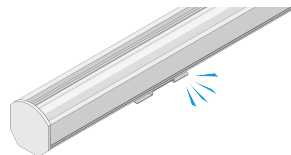

3. Attach Driver and Lighting Control

Using a junction box, connect lead wires from Graze X to wires connected to power supply.



Verify a compatible driver is installed. Utilize applicable wiring when installing outdoors. (Use of wet location-rated junction box recommended)

4. Turn Power On at Circuit Breaker


SYSTEM DIAGRAM

Mount using included mounting clips/screws.

The following diagram is an example system design. For information regarding larger systems or systems not pictured below, please see our web page or contact technical support. Always review each component installation guide for detailed and up-to-date wiring instructions. Install in accordance with national and local electrical codes.

Other diagrams will vary based on power and dimming requirements.

Standard Dimmer System

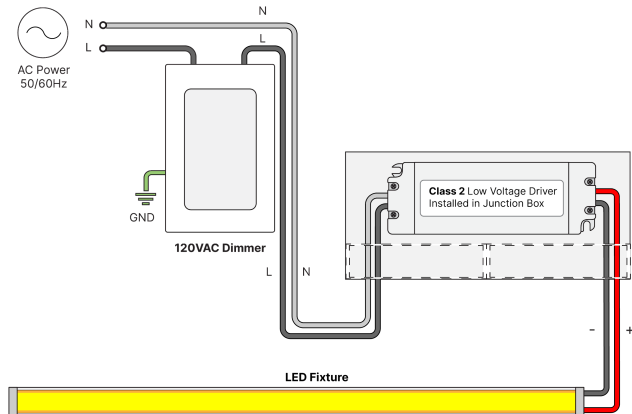

PLACEMENT RECOMMENDATION

To avoid dark spots, it is recommended to place each Graze X Fixture no further than 6 inches from one another.

