

### VALENT® RGBW 24V

#### Color Changing LED Tape Light

Bright, saturated RGBW tape light for high performance color changing applications. Capable of billions of color combinations, plus pure 3000K white light.


Date \_\_\_\_\_

Project Notes \_\_\_\_\_



#### FEATURES

- Dense LED placement for uninterrupted linear light
- RGB Tri-Chip and 3000K White Chip capable of billions of colors
- Controllable via DMX, Casambi, Touchdial, and other options
- 2 inch cuttable increments
- 7 Year limited warranty

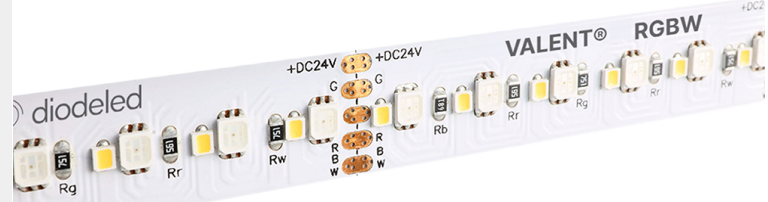

#### ORDERING CODES

Order spools, and components for field assembly

#### OPTIONAL ORDERING CODES

Add Assembly Preferences, Finish, Lens, Mounting, Driver, and Delivery

DI	Voltage	Model	Color	Length	Channels	Finish	Lens	Mounting	Driver	Delivery
	24V (24V Volt)	VL	RGBW	016 (16.4 feet) 100 (100 feet)	S1 (S1) 16 (16mm Square) 45DCO (45° Deco) MI2 (2-inch Mud-In)	AL (Aluminum)	*blank* (Classic Frosted Lens)	3M (3M Adhesive)	O/O (On / Off)	Field Assembly
					S2 (S2) RC20 (20mm Round) 90 (90° Sideview) REC (Recessed)	BL (Black)	BL (Black Lens)	MC (Mounting Clip)	PoE (Power over Ethernet)	Factory + Field (Hybrid)
					S45 (S45) SQ20 (20mm Square) REF (Reflector) WF (Waveform)	WH (White)	CLT (Arch. Clear Lens)	UC (U-Clip)		Factory Assembly
					SL (Slim) SQ (Square) ROD (Rod)		FRT (Arch. Frosted Lens)	VC (Vertical Clip)		
					CA (Canal) 45 (45°) MI1 (1-inch Mud-In)		OPT (Opal Lens)	HNG (Hanging Hardware)		
							PD (Prem. Diffusion Lens)	RC (Rotating Clip)		

*\*See page 2 for Channel / Lens / Mounting compatibility*

#### VALENT® RGBW - SPECIFICATION TABLE

<b>Models</b>	<b>24V-VL</b>
<b>Voltage</b>	<b>24VDC</b>
<b>Wattage</b>	<b>6.1W/ft.</b>
Lumens RGBW	All: 291 Lm/ft. White: 144 Lm/ft. Red: 36 Lm/ft. Green: 104 Lm/ft. Blue: 23 Lm/ft.
Cut Points	2 in.
Max Run (ft.)	16.4 ft.
CRI	90+ (3000K)
Dimensions	0.47 × 0.06 in. (L x W x H) Connector Size: 12mm
TM-21 (LM-80)	>50,000 hours
Environment	Indoor / Damp Location (IP20)
Lead Wire A	36 in. Bare Lead 20/5 AWG UL 2464 Wire with Strain Relief
Lead Wire B	36 in. Bare Lead 20/5 AWG UL 2464 Wire with Strain Relief
LED Chips	72/ft.
Certification	UL Listed 2108
Warranty	7 Year

**VALENT® RGBW 24V**  
Color Changing LED Tape Light

Bright, saturated RGBW tape light for high performance color changing applications. Capable of billions of color combinations, plus pure 3000K white light.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



**CHANNEL / LENS / MOUNTING COMPATIBILITY**

Channel	Compatible Lenses	Available Finishes	Mounting Options
S1 (S1)	*blank*	AL	UC
S2 (S2)	*blank*	AL	UC
S45 (S45)	*blank*	AL	UC
SL (Slim)	*blank* / CLT / FRT / BL / PD	AL / WH / BL	MC / 3M / MAG
CA (Canal)	OPT	AL / WH / BL	UC
16 (16mm Square)	FRT	AL	MC
RC20 (20mm Round)	*blank*	AL	UC
SQ20 (20mm Square)	*blank*	AL	UC
SQ (Square)	*blank* / CLT / FRT / BL / PD	AL / WH / BL	MC / VC / RC / HNG
45 (45°)	*blank* / CLT / FRT / BL / PD	AL / WH / BL	MC / VC / RC / HNG
45DCO (45° Deco)	*blank*	AL	MC
90 (90° Sideview)	*blank*	AL	MC
REF (Reflector)	*blank*	AL	
ROD (Rod)	*blank*	AL	RC / CLO / ART / ARM
MI1 (1-inch Mud-In)	OPT	AL	
MI2 (2-inch Mud-In)	OPT	AL	
REC (Recessed)	*blank*	AL	3M
WF (Waveform)	*blank*	AL	3M / UC

**LEGEND**

Lens		Finish		Mounting	
*blank*	Classic Frosted Lens	AL	Aluminum	3M	3M Adhesive
BL	Black Lens	WH	White	ARM	Wall Arm
CLT	Architectural Clear Lens	BL	Black	ART	Art Lighting Arm
FRT	Architectural Frosted Lens			CLO	Closet Mount
OPT	Opal Lens			HNG	Hanging Hardware
PD	Premium Diffusion Lens			MAG	Magnetic Clip
				MC	Mounting Clip
				RC	Rotating Clip
				UC	U-Clip
				VC	Vertical Clip

**VALENT® RGBW 24V**  
**Color Changing LED Tape Light**

Bright, saturated RGBW tape light for high performance color changing applications. Capable of billions of color combinations, plus pure 3000K white light.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



**RECOMMENDED CHANNELS**

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>S1 Channel</b> DI-CHB-S1  (S1) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.31 in. Width (W): 0.67 in. Interior Depth (ID): 0.25 in. Interior Width (IW): 0.58 in.  	48 in. channel & frosted cover 2x surface mounting clips End caps: 1x open, 1x closed.	 12mm Tape Light: Soldered Lead Only	Classic Frosted Lens VL: Semi-Diffused	<ul style="list-style-type: none"> <li>Beam Angle: 120°</li> <li>Classic Frosted Lens</li> <li>Light Loss: 20%</li> <li>CCT Shift: -40K</li> <li>IP Rating Shift: IP40</li> </ul>	 U-Clip: 0.32 x 0.68 in. (H x W)
<b>S2 Channel</b> DI-CHB-S2  (S2) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.57 in. Width (W): 0.74 in. Interior Depth (ID): 0.34 in. Interior Width (IW): 0.63 in.  	48 in. Channel & Frosted Lens, 1 open end cap, 1 closed end cap, 2 mounting clips, 2 mounting screws  96 in. Channel & Frosted Lens, 2 open end cap, 2 closed end cap, 4 mounting clips, 4 mounting screws	 12mm Tape Light: Soldered Lead Only	Classic Frosted Lens VL: Dotless	<ul style="list-style-type: none"> <li>Beam Angle: 120°</li> <li>Classic Frosted Lens</li> <li>Light Loss: 20%</li> <li>CCT Shift: -40K</li> <li>IP Rating Shift: IP40</li> </ul>	 U-Clip: 0.58 x 0.75 in. (H x W)
<b>S45 Channel</b> DI-CHB-S45  (S45) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.78 in. Width (W): 0.78 in. Interior Depth (ID): 0.54 in. Interior Width (IW): 0.6 in.  	48 in. Channel & Frosted Lens, 1 open end cap, 1 closed end cap, 2 mounting clips, 2 mounting screws  96 in. Channel & Frosted Lens, 2 open end cap, 2 closed end cap, 4 mounting clips, 4 mounting screws	 12mm Tape Light: Soldered Lead Only	Classic Frosted Lens VL: Dotless	<ul style="list-style-type: none"> <li>Beam Angle: 120°</li> <li>Classic Frosted Lens</li> <li>Light Loss: 20%</li> <li>CCT Shift: -40K</li> <li>IP Rating Shift: IP40</li> </ul>	 U-Clip: 0.79 x 0.79 in. (H x W)
<b>Slim Channel</b> DI-CPCHB-SL  (SL) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller	Height (H): 0.38 in. Width (W): 0.82 in. Interior Depth (ID): 0.3 in. Interior Width (IW): 0.67 in.  	48" Aluminum, Black, & White Channels • 48 in. channel & lens • 2x surface mounting clips • End caps: 1x open, 1x closed  96" Aluminum, Black, & White Channels • 96 in. channel & lens • 4x surface mounting clips • end caps: 2x open, 2x closed	 12mm Tape Light: Soldered Lead Only	Architectural Frosted Lens VL: Semi-Diffused  Premium Diffusion Lens VL: Dotless  For diffusion options not listed, refer to Slim Channel Specification Sheet.	<ul style="list-style-type: none"> <li>Beam Angle: 120°</li> <li>Architectural Clear Lens</li> <li>Light Loss: 10%</li> <li>CCT Shift: -20K</li> <li>Architectural Frosted Lens</li> <li>Light Loss: 30%</li> <li>CCT Shift: -35K</li> <li>Classic Frosted Lens</li> <li>Light Loss: 20%</li> <li>CCT Shift: -40K</li> <li>Black Lens</li> <li>Light Loss: 90%</li> <li>CCT Shift: -350K</li> <li>Premium Diffusion Lens</li> <li>Light Loss: 10%</li> <li>CCT Shift: -30K</li> <li>IP Rating Shift: IP40</li> </ul>	 Slim Mount: 0.54 x 0.87 in. (H x W) 3M Adhesive: 0.48 x 0.82 in. (H x W) Magnetic U-Clip: 0.59 x 0.82 in. (H x W) Premium Diffusion: 0.96 x 0.82 in. (H x W)

**VALENT® RGBW 24V**  
Color Changing LED Tape Light

Bright, saturated RGBW tape light for high performance color changing applications. Capable of billions of color combinations, plus pure 3000K white light.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



**RECOMMENDED CHANNELS**

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>Canal Channel</b> DI-CPCHB-CAN  (CA) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller	Height (H): 0.59 in. Width (W): 0.69 in. Interior Depth (ID): 0.54 in. Interior Width (IW): 0.61 in.  	48" Aluminum, Black, & White Channels • 48 in. channel & opal lens • 2x surface mounting clips • End caps: 1x open, 1x closed.  96" Aluminum, Black, & White Channels • 96 in. channel & opal lens • 4x surface mounting clips • End caps: 2x open, 2x closed.	<p>12mm Tape Light: Soldered Lead Only</p>	Opal Lens VL: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Opal Lens</li> <li>• Light Loss: 55%</li> <li>• CCT Shift: -200K</li> <li>• IP Rating Shift: IP40</li> </ul>	<p>U-Clip: 0.6 x 0.7 in. (H x W)</p>
<b>16mm Square Channel</b> DI-CPCHB-16MM  (16) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 0.89 in. Width (W): 0.77 in. Interior Width (IW): 0.63 in.  	48 in. channel & Architectural Frosted Lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & Architectural Frosted Lens 4x surface mounting clips End caps: 2x open, 2x closed.	<p>12mm Tape Light: Soldered Lead Only</p>	Architectural Frosted Lens VL: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Architectural Frosted Lens</li> <li>• Light Loss: 30%</li> <li>• CCT Shift: -35K</li> <li>• Black Lens</li> <li>• Light Loss: 90%</li> <li>• CCT Shift: -350K</li> <li>• IP Rating Shift: IP40</li> </ul>	<p>Mounting Clip: 0.89 x 0.77 in. (H x W)</p>
<b>20mm Round Channel</b> DI-CPCHB-RC20  (RC20) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 1.18 in. Width (W): 1.18 in. Interior Width (IW): 0.84 in.  	48 in. channel & frosted lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & frosted lens 4x surface mounting clips End caps: 2x open, 2x closed.	<p>12mm Tape Light: Soldered Lead Only</p>	Classic Frosted Lens VL: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 180°</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	<p>U-Clip: 1.19 x 1.19 in. (H x W)</p>
<b>20mm Square Channel</b> DI-CPCHB-SQC20  (SQ20) 48", 96" Aluminum For 14mm Tape Lights or smaller	Height (H): 1.18 in. Width (W): 1.18 in. Interior Width (IW): 0.84 in.  	48 in. channel & frosted lens 2x surface mounting clips End caps: 1x open, 1x closed.  96 in. channel & frosted lens 4x surface mounting clips End caps: 2x open, 2x closed.	<p>12mm Tape Light: Soldered Lead Only</p>	Classic Frosted Lens VL: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 180°</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	<p>U-Clip: 1.19 x 1.19 in. (H x W)</p>

### VALENT® RGBW 24V

#### Color Changing LED Tape Light

Bright, saturated RGBW tape light for high performance color changing applications. Capable of billions of color combinations, plus pure 3000K white light.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### RECOMMENDED CHANNELS

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>Square Channel</b> DI-CPCHB-SQ  (SQ) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller		<b>48" Aluminum Channel</b> • 48 in. channel & frosted cover • Mounting hardware • End caps: 1x open, 1x closed.  <b>48" Black &amp; White Channels</b> • 48 in. channel & clear, or frosted lens • 4x surface mounted clips • 2x End-to-end interconnects  <b>96" Aluminum Channel</b> • 96 in. channel & frosted cover • Mounting hardware • End caps: 2x open, 2x closed.  <b>96" Black &amp; White Channels</b> • 96 in. channel & clear, or frosted lens • 4x surface mounted clips • 2x End-to-end interconnects		<b>Architectural Frosted Lens</b> VL: Semi-Diffused  <b>Premium Diffusion Lens</b> VL: Dotless  For diffusion options not listed, refer to Square Channel Specification Sheet.	• Beam Angle: 120°  <b>Architectural Clear Lens</b> • Light Loss: 10% • CCT Shift: -20K  <b>Architectural Frosted Lens</b> • Light Loss: 30% • CCT Shift: -35K  <b>Classic Frosted Lens</b> • Light Loss: 20% • CCT Shift: -40K  <b>Black Lens</b> • Light Loss: 90% • CCT Shift: -350K  <b>Premium Diffusion Lens</b> • Light Loss: 10% • CCT Shift: -30K  • IP Rating Shift: IP40	
<b>45° Channel</b> DI-CPCHB-45  (45) 48", 96" Aluminum, White, Black For 14mm Tape Lights or smaller		<b>48" Aluminum, Black, &amp; White Channels</b> • 48 in. channel & clear, or frosted lens • 4x surface mounted clips • 2x End-to-end interconnects  <b>96" Aluminum Channel</b> • 96 in. channel & clear, or frosted lens • 8x surface mounted clips • 4x End-to-end interconnects  <b>96" Black &amp; White Channels</b> • 96 in. channel & clear, or frosted lens • 4x surface mounted clips • 2x End-to-end interconnects		<b>Architectural Frosted Lens</b> VL: Semi-Diffused  <b>Premium Diffusion Lens</b> VL: Dotless  For diffusion options not listed, refer to 45° Channel Specification Sheet.	• Beam Angle: 120°  <b>Architectural Clear Lens</b> • Light Loss: 10% • CCT Shift: -20K  <b>Architectural Frosted Lens</b> • Light Loss: 30% • CCT Shift: -35K  <b>Classic Frosted Lens</b> • Light Loss: 20% • CCT Shift: -40K  <b>Black Lens</b> • Light Loss: 90% • CCT Shift: -350K  <b>Premium Diffusion Lens</b> • Light Loss: 10% • CCT Shift: -30K  • IP Rating Shift: IP40	
<b>45° Deco Channel</b> DI-CPCHB-45DCO  (45DCO) 48", 96" Aluminum For 10mm Tape Lights or smaller		<b>48 in. channel &amp; frosted cover</b> Mounting hardware End caps: 1x open, 1x closed.  <b>96 in. channel &amp; frosted cover</b> Mounting hardware End caps: 2x open, 2x closed.		<b>Classic Frosted Lens</b> VL: Semi-Diffused	• Beam Angle: 120°  <b>Classic Frosted Lens</b> • Light Loss: 20% • CCT Shift: -40K  • IP Rating Shift: IP40	
<b>90° Sideview Channel</b> DI-CPCHB-90SD  (90) 48", 96" Aluminum For 12mm Tape Lights or smaller		<b>48 in. channel &amp; frosted cover</b> Mounting hardware End caps: 1x open, 1x closed.  <b>96 in. channel &amp; frosted cover</b> Mounting hardware End caps: 2x open, 2x closed.		<b>Classic Frosted Lens</b> VL: Semi-Diffused	• Beam Angle: 120°  <b>Classic Frosted Lens</b> • Light Loss: 20% • CCT Shift: -40K  • IP Rating Shift: IP40	

**VALENT® RGBW 24V**  
Color Changing LED Tape Light

Bright, saturated RGBW tape light for high performance color changing applications. Capable of billions of color combinations, plus pure 3000K white light.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



**RECOMMENDED CHANNELS**

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>Reflector Channel</b> DI-CPCHB-RFCTR  (REF) 48", 96" Aluminum For 12mm Tape Lights or smaller		48 in. channel & frosted cover End caps: 1x open, 1x closed.  96 in. channel & frosted cover End caps: 1x open, 1x closed.		Classic Frosted Lens VL: Semi-Diffused	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	<p>Recessed Mount: 2.75 x 1 in. (H x W)</p>
<b>Rod Channel</b> DI-CPCHB-RDCL  (ROD) 48", 96" Aluminum For 12mm Tape Lights or smaller		78.74 in. channel & frosted lens 1x open end-cap, 1x closed end-cap 4 x 180° swivel brackets 2x Closet Mounting Brackets 2x Support Brackets		Classic Frosted Lens VL: Semi-Diffused	<ul style="list-style-type: none"> <li>• Beam Angle: 180°</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	<p>Rotating Mount: 1.69 x 0.95 in. (H x W)            Closet Mount: 1.28 x 3.25 in. (H x W)            Art Lighting Arm: 2.72 x 10.15 in. (H x W)            Wall Arm: 4.5 x 2.15 in. (H x W)</p>
<b>1-inch Mud-In Channel</b> DI-CPCHB-MUD1  (MI1) 48", 96" Aluminum For 14mm Tape Lights or smaller		96 in. channel & opal lens 2x surface mounting clips End caps: 2x open, 2x closed.		Opal Lens VL: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Opal Lens</li> <li>• Light Loss: 55%</li> <li>• CCT Shift: -200K</li> <li>• IP Rating Shift: IP40</li> </ul>	<p>Recessed Mount: 0.54 x 2.42 in. (H x W)</p>
<b>2-inch Mud-In Channel</b> DI-CPCHB-MUD2  (MI2) 48", 96" Aluminum For 14mm Tape Lights or smaller		96 in. channel & opal lens 2x surface mounting clips End caps: 2x open, 2x closed.		Opal Lens VL: Dotless	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Opal Lens</li> <li>• Light Loss: 55%</li> <li>• CCT Shift: -200K</li> <li>• IP Rating Shift: IP40</li> </ul>	<p>Recessed Mount: 0.8 x 3.86 in. (H x W)</p>

**VALENT® RGBW 24V**  
**Color Changing LED Tape Light**

Bright, saturated RGBW tape light for high performance color changing applications. Capable of billions of color combinations, plus pure 3000K white light.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



**RECOMMENDED CHANNELS**

MODEL	DIAGRAM	INCLUDED ACCESSORIES	CONNECTION OPTIONS	IN CHANNEL DIFFUSION	TECHNICAL RATINGS	MOUNTING OPTIONS WITH DIMENSIONS
<b>Recessed Channel</b> DI-CPCHB-REC (REC) 48", 96" Aluminum For 12mm Tape Lights or smaller	Height (H): 0.49 in. Width (W): 1.03 in. Interior Depth (ID): 0.42 in. Interior Width (IW): 0.59 in. Cut Out Width (CO): 0.74 in. Recessed Wing (RW): 0.15 in. 	48 in. channel & frosted lens 2x surface mounted clips end caps: 1x open, 1x closed 96 in. channel & frosted lens 4x surface mounted clips end caps: 2x open, 2x closed.	<p>12mm Tape Light: Soldered Lead Only</p>	<p>Classic Frosted Lens            VL: Runway Diffusion</p>	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	<p>3M Adhesive: 0.59 × 1.03 in. (H x W)</p> <p>Recessed Mount: 0.49 × 1.03 in. (H x W)</p>
<b>Waveform Channel</b> DI-CPCHB-WF (WF) 48" Aluminum For 12mm Tape Lights or smaller	Height (H): 0.3 in. Width (W): 0.71 in. Interior Width (IW): 0.49 in. Height W/o Cover (H/C): 0.2 in. 	48 in. channel & frosted lens 2x surface mounting clips End caps: 1x open, 1x closed.	<p>12mm Tape Light: Soldered Lead Only</p>	<p>Classic Frosted Lens            VL: Runway Diffusion</p>	<ul style="list-style-type: none"> <li>• Beam Angle: 120°</li> <li>• Min. Bend Radius: 8 in.</li> <li>• Classic Frosted Lens</li> <li>• Light Loss: 20%</li> <li>• CCT Shift: -40K</li> <li>• IP Rating Shift: IP40</li> </ul>	<p>3M Adhesive: 0.4 × 0.71 in. (H x W)</p> <p>U-Clip: 0.31 × 0.72 in. (H x W)</p>

### VALENT® RGBW 24V

#### Color Changing LED Tape Light

Bright, saturated RGBW tape light for high performance color changing applications. Capable of billions of color combinations, plus pure 3000K white light.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



### RECOMMENDED 24V DRIVERS

SKU	INPUT VOLTAGE / FREQUENCY	OUTPUT VOLTAGE	MAXIMUM LOAD	MINIMUM LOAD	CLASS 2	DIMMABLE	LENGTH	WIDTH	HEIGHT
<b>VLM Series Constant Voltage Driver</b> Compact driver for on/off, PWM dimming, and color-changing applications. <a href="https://www.diodeled.com/custom/download/productFile/fileName/VLM-Specification%20Sheet%20(Driver%20&amp;%20J-Box).pdf">https://www.diodeled.com/custom/download/productFile/fileName/VLM-Specification%20Sheet%20(Driver%20&amp;%20J-Box).pdf</a>									
VLM Series Constant Voltage Driver Specification Sheet Contains: • Additional Models • Derating Curves • Additional Features • System Diagrams									
VLM60W-24-LPS3R	120 / 277VAC 47 - 63Hz	24V	60W	No Minimum Load	Yes	PWM	10.79 in.	7.34 in.	2.36 in.
VLM60W-24-LPM	120 / 277VAC 47 - 63Hz	24V	60W	No Minimum Load	Yes	PWM	8.19 in.	2.94 in.	1.31 in.
VLM100W-24-LPS3R	120 / 277VAC 47 - 63Hz	24V	100W	No Minimum Load	Yes	PWM	10.79 in.	7.34 in.	2.36 in.
VLM200W-24-LPL	120 / 277VAC 47 - 63Hz	24V	200W	No Minimum Load	Yes	PWM	13.5 in.	4.5 in.	2.38 in.
<b>MEANWELL Constant Voltage Driver</b> Drivers for on/off or PWM dimming applications. <a href="https://www.diodeled.com/custom/download/productFile/fileName/commercial-grade-CV-Driver-Specification%20Sheet%20(24V%20Models).pdf">https://www.diodeled.com/custom/download/productFile/fileName/commercial-grade-CV-Driver-Specification%20Sheet%20(24V%20Models).pdf</a>									
MEANWELL Constant Voltage Driver Specification Sheet Contains: • Additional Models • Derating Curves • Additional Features • System Diagrams									
DI-CV-MW24V60W-277-LPS3R	120 ~ 277VAC 50/60Hz	24V	60W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	10.79 in.	7.34 in.	2.36 in.
DI-CV-MW24V60W-277-LPS	120 ~ 277VAC 50/60Hz	24V	60W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	11.25 in.	3.75 in.	1.9 in.
DI-CV-MW24V90W-277-LPS3R	120 ~ 277VAC 50/60Hz	24V	90W	No Minimum Load	Yes	Yes, with compatible PWM dimmer/controls	10.79 in.	7.34 in.	2.36 in.
<b>PoE (Power over Ethernet)</b> Constant voltage platform, ready for Power over Ethernet (inquire)									

### RECOMMENDED CONTROLLERS

SKU	DESCRIPTION
<b>CASAMBI® Controllers</b> The CASAMBI controllers will remotely control your lighting through the app - downloadable for IOS & Android.	
CBU-PWM4	CASAMBI PWM4 Single Color Dimming Controller
CBU-A2D	CASAMBI A2D 2 Channel 0-10V/DALI Controller
CBU-ASR	CASAMBI ASR 0-10V Controller
CBU-TED	CASAMBI TED AC High Voltage Controller
<b>Nicolaudie DMX LED Controllers</b> Store up to 500 scenes across 10 separate zones with a full-color display.	
DI-DMX-DE3	Nicolaudie STICK-DE3 DMX LED Controller
DI-DMX-ESA	Nicolaudie Easy Stand Alone DMX LED Color Controller - 5k Memory





**VALENT® RGBW 24V**  
Color Changing LED Tape Light

Bright, saturated RGBW tape light for high performance color changing applications. Capable of billions of color combinations, plus pure 3000K white light.


Date \_\_\_\_\_

Project Notes \_\_\_\_\_



**MECHANICAL DIAGRAMS**

24V-VL

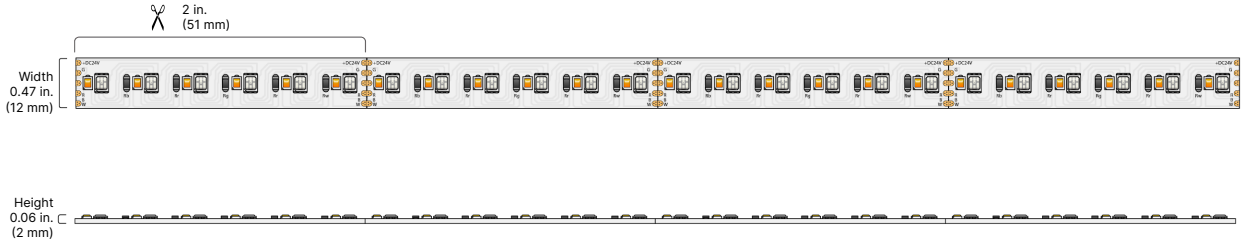

**CONNECTIONS**



36 in. Bare Lead 20/5 AWG UL 2464 Wire with Strain Relief

36 in. Bare Lead 20/5 AWG UL 2464 Wire with Strain Relief

**VALENT® RGBW 24V**  
Color Changing LED Tape Light

Bright, saturated RGBW tape light for high performance color changing applications. Capable of billions of color combinations, plus pure 3000K white light.


Date \_\_\_\_\_

Project Notes \_\_\_\_\_



**ACCESSORIES**

Soldered Lead Only

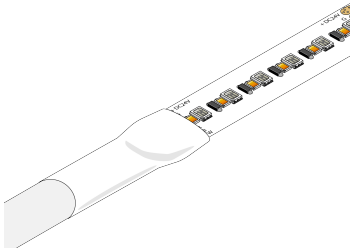

**DELIVERY OPTIONS**

- **Field Assembly**  
Fastest order fulfillment. Field connectors and accessories not included.
- **Factory + Field (Hybrid)**  
Onsite modifications with factory connection. Additional accessories not included.
- **Factory Assembly**  
Fastest Installation. Factory made-to-order fixtures.

- Lumen value measured in accordance to IES LM-80-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length. Max run may exceed Class 2 limit. Actual wattage may differ from calculated wattage due to voltage drop across run.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value can be calculated as follows: Lumen value divided by average power consumption per foot.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.

### VALENT® RGBW 24V

#### Color Changing LED Tape Light

Bright, saturated RGBW tape light for high performance color changing applications. Capable of billions of color combinations, plus pure 3000K white light.

Date \_\_\_\_\_

Project Notes \_\_\_\_\_



## CERTIFICATIONS

### Safety

- UL Listed 2108 Low Voltage Lighting System / Low Voltage Luminaire. UL 1598 / CSA 250.0-08, UL 8750. UL 879 / CAN/CSA-C22.2 no. 207-M89. Certified for United States and Canada. File # E469769.
- UL Listed Field Cuttable.
- Approved for storage areas of clothes closets per NEC 410.16.A.1,3 and 410.16.C.1,3,5

### Environment

- Ambient Temperature: -4 ~ 122°F (-20 ~ 50°C)
- Operating Temperature: -4 ~ 176°F (-20 ~ 80°C)
- RoHS Compliant: Verification No. CANEC1610091501

### Performance

- LED chip data measured in accordance to IES LM-80-08.
- Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Elemental LED's Innovation Lab.

## Safety / Warnings / Disclosures

1. Install in accordance with national and local electrical code regulations.
2. This product is intended to be installed and serviced by a qualified, licensed electrician.
3. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
4. Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
5. Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Tape light and attached wire leads are field-cuttable.
6. Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.
7. Do not install in environment where LED chips are exposed to direct sunlight as damage to the phosphor will occur.
8. Do not install in environment where excessive heat may exist (ex. close proximity to fireplace, etc.) See Ambient Temperature ratings
9. Do not install indoor LED tape light products in outdoor / wet location environments. Only wet location tape light models are rated for outdoor / wet locations.
10. Do not modify product beyond instructions or warranty will be void.
11. Tape light must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
12. Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
13. We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

## WARRANTY

### Limited Warranty

- 7 Year limited warranty

This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at [www.diodeled.com/limited-warranty/](http://www.diodeled.com/limited-warranty/) within the Policies section. For warranty related questions please contact product support.

### Consumer's Acknowledgment

Elemental LED, Inc. stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Elemental LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Elemental LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Elemental LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Elemental LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Elemental LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Elemental LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.