

# INFINILINE®

## DRIVERLESS LINEAR LIGHTING

120VAC linear lighting, no driver required. Ideal for long runs, such as commercial coves. Up to 164 linear feet on a single circuit. Factory assembled to your lengths for UL compliance as a hardwired or plug-in fixture.



**120  
VAC**

**90+  
CRI**

  
**IP65**

### FEATURES & BENEFITS

- Driverless LED light
- Plug-in or hardwired connections
- Deep cold resistant

### QUICK SPECS

Voltage	120VAC
Width	18mm
CRI	90+
Warranty	5-Year Limited Warranty
Dimming	Dimmable (Hardwired Only)
Environment	Outdoor / Wet Location (IP65)
Certification	UL Listed 2388 (Plug-in), UL Listed 1598, ETL Certified Canada (Hardwired)
Connection	Hardwired or Plug-in

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.



# VICTORY LANE




# SPECIFICATIONS & SKU BUILDER


DI	—	VOLTAGE	—	MODEL	—	CCT	—	CONNECTION	—	LENGTH
DI	—	120V (120VAC)	—	INFBSC3	—	27 (2700K)	—	H (Hardwired)	—	164 (164 ft.)
						30 (3000K)		N/A (Plug-in)		Custom (Contact Quotes)
						35 (3500K)				
						42 (4200K)				

EXAMPLE: 120V INFINILINE® 3500K PLUG-IN 20 FT. CUSTOM CUT = DI-120V-INFBSC3-35-H-20

120VAC	
INFBSC3	
Max. Run: 164 ft.	Wattage: 3.7 W/ft.
CCT	Lumens / ft.
2700K	289
3000K	300
3500K	308
4200K	351

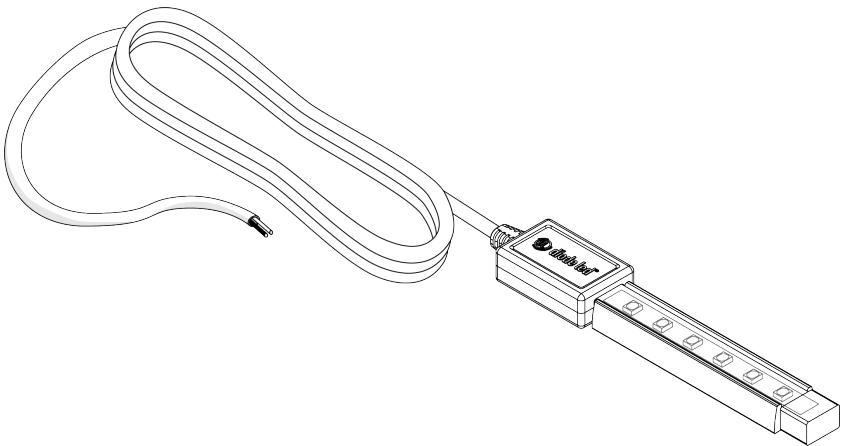

INFINILINE® Hardwire Connection

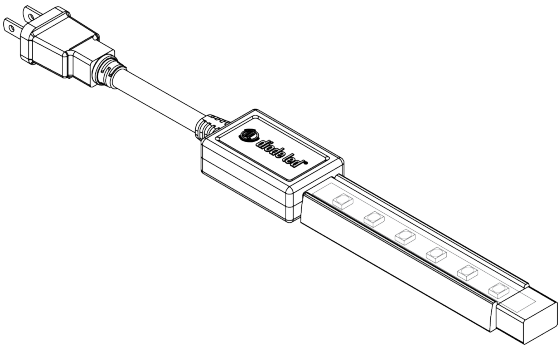

INFINILINE® Plug-in Connection