


# MIKRODIM™ ELECTRONIC DIMMABLE DRIVER

A compact, dimmable power supply with no minimum load. State-of-the-art design is patented with built-in short circuit protection and industry-leading dimming performance.

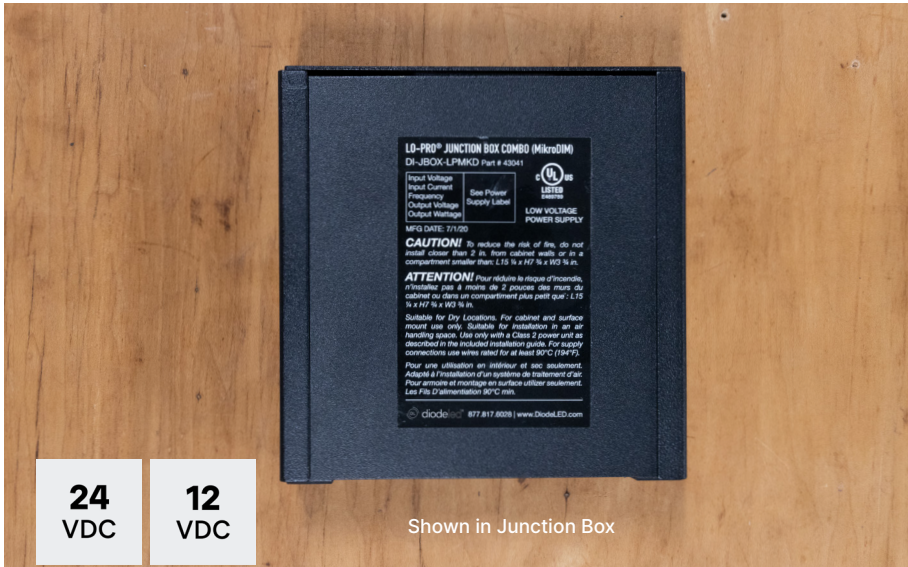

## FEATURES & BENEFITS

- No minimum load
- Compact design
- ELV Dimming

## QUICK SPECS

Environment	Indoor
Input Voltage	120VAC
Output Voltage	12VDC & 24VDC models
Connection Type	Bare Wire Leads
Warranty	5-Year Warranty
Dimming	ELV Dimming
Certification	UL Component Recognized, UL Listed with Junction Box

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.

## 24V MIKRODIM™

OUTPUT	SKU	WATTAGE	CLASS 2	ENVIRONMENT	DIMENSIONS
24 VDC	DI-MKD-24V60W (Driver Only)	60W	Yes	Indoor / Damp Location	3.0 × 1.3 × 1.0 in.
	DI-MKD60W-24-LPMKD (Driver with Junction Box)	60W	Yes	Indoor / Damp Location	4.25 × 4.34 × 1.48 in.

## 12V MIKRODIM™

OUTPUT	SKU	WATTAGE	CLASS 2	ENVIRONMENT	DIMENSIONS
12 VDC	DI-MKD-12V60W (Driver Only)	60W	Yes	Indoor / Damp Location	3.0 × 1.3 × 1.0 in.
	DI-MKD60W-12-LPMKD (Driver with Junction Box)	60W	Yes	Indoor / Damp Location	4.25 × 4.34 × 1.48 in.

\*Note: MikroDIM™ is not for use with VALENT®, VALENT® X, AlphaTECH® X, or GRAZE X™ lighting.