


OMNIDRIVE® BASICS

ELECTRONIC DIMMABLE DRIVER

OMNIDRIVE® BASICS is a compact electronic dimmable (ELV) driver for everyday projects. Compatible with the most popular dimmers.

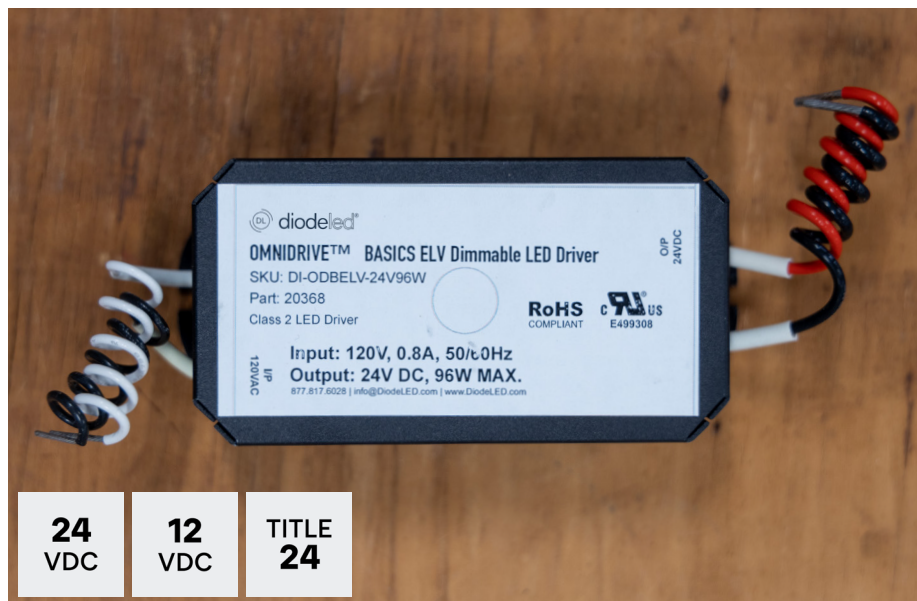

FEATURES & BENEFITS

- Simple to install
- Versatile form factor
- No minimum load
- Smooth dimming to 5%
- Optional UL Listed Junction Box

QUICK SPECS

Environment	Indoor / Damp Location (IP20)
Input Voltage	120VAC
Output Voltage	12VDC & 24VDC models
Connection Type	18 AWG Bare Wire Leads
Warranty	5-Year Limited Warranty
Dimming	Dimmable
Certification	UL Recognized / Class 2, UL Listed with Junction Box

Visit the product page on the website for specification sheets, install guides, IES files, and photometric reports.

24V OMNIDRIVE® BASICS

OUTPUT	SKU	WATTAGE	CLASS 2	ENVIRONMENT	DIMENSIONS
24 VDC	DI-ODBELV-24V60W	60W	Yes	Indoor / Damp Location	4.2 × 1.75 × 0.96 in.
	DI-ODBELV-24V60W-LPELV	60W	Yes	Indoor / Damp Location	5.5 × 0.96 × 4.7 in.
	DI-ODBELV-24V96W	96W	Yes	Indoor / Damp Location	4.37 × 1.5 × 2.19 in.
	DI-ODBELV-24V96W-LPS	96W	Yes	Indoor / Damp Location	11.25 × 1.9 × 3.75 in.

12V OMNIDRIVE® BASICS

OUTPUT	SKU	WATTAGE	CLASS 2	ENVIRONMENT	DIMENSIONS
12 VDC	DI-ODBELV-12V60W	60W	Yes	Indoor / Damp Location	4.2 × 1.75 × 0.96 in.
	DI-ODBELV-12V60W-LPELV	60W	Yes	Indoor / Damp Location	5.5 × 0.96 × 4.7 in.

*Note: OMNIDRIVE® Basics is not for use with VALENT®, VALENT® X, AlphaTECH® X, or GRAZE X™ lighting.