

LINAIRE® Flex Top Bend RGBW Linear Light

Top-bending RGBW architectural light with vibrant, full-spectrum output. Water resistant and fully diffused for a dotless look.


Date _____

Project Notes _____



FEATURES

- Top-bending architectural profile
- Flexible, durable fixture with no visible dots
- Water resistant for indoor and outdoor use
- Full color RGBW
- 90+ CRI
- Factory assembly (IP67), Field adjustable termination (IP65)

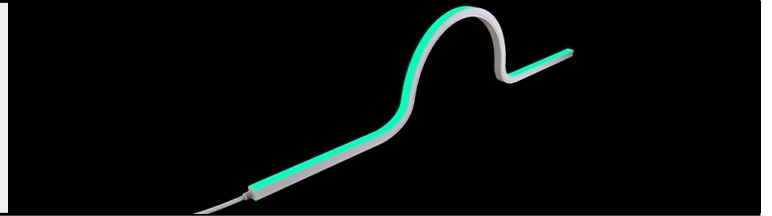

ORDERING CODES

Order spools, and components for field assembly

HYBRID ORDERING CODE (OPTIONAL)


Soldered Wire Lead and Connection Options

| DI | Voltage | Model | Series | Color | Length | Wire Entry | Input Wire Color, Length, and Connection | | | Output Wire Color, Length, and Connection | | |
|----|-------------------|-------|--------|----------------|--|--|--|---|-----------------------------|---|--|-----------------------------|
| | | | | | | | Color & Type | Length | Connection | Color & Type | Length | Connection |
| | 24V (24V VoIt) | TE | LIN | RGBW (RGBW) | 016 (16 feet wet location) CSTM_ (__in.) wet location | STE (Straight Wire Entry) SDE* (Side Wire Entry) BE* (Bottom Wire Entry) *Alternate Wire Leads Available via Factory Finished Only | WH (White CL2 - Default) | 36l (36 in. - Default) __ in. | BW (Bare Wire - Default) | WH (White CL2) | *blank* (No Wire - Default) __ in. | BW (Bare Wire - Default) |


GENERAL SPECIFICATIONS (ALL MODELS)

| | |
|-------------------------|--|
| Voltage | 24VDC |
| Wattage | 4.5W/ft. |
| RGBW | All: 122 Lm/ft. 3000K: 45 Lm/ft. Red: 16 Lm/ft. Green: 58 Lm/ft. Blue: 11 Lm/ft. |
| Cut Points | 1.96 in. |
| Dimmable | Yes |
| Max Run (ft.) | 16.4 ft. |
| CRI | 90+ |
| Dimensions | 0.63 x 0.63 in. (W x H) |
| Environment | Outdoor / Wet Location (IP65 / IP67) |
| Lead Wire A | 96 in. White Bare Lead 20/5 AWG UL 3132 Wire with Strain Relief |
| Lead Wire B | 96 in. White Bare Lead 20/5 AWG UL 3132 Wire with Strain Relief |
| LED Chips | 29/ft. |
| Chip Type | 5050 |
| Certification | UL Listed 2108 |
| Limited Warranty | 5 Year Limited Warranty |


MECHANICAL DIAGRAMS

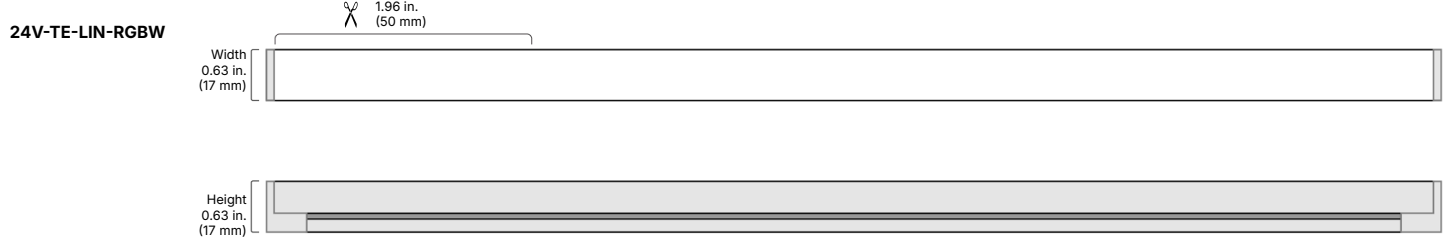


CONNECTIONS

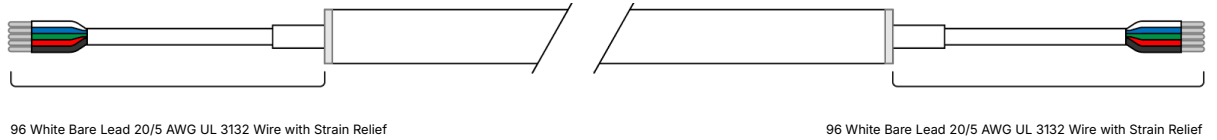

24V-TE-LIN-RGBW in
LINAIRE Flex Top Bend Channel




24V-TE-LIN-RGBW in
LINAIRE Flex Top Bend Spine Channel



ACCESSORIES


DI-LIN-TE-MTCH-39

LINAIRE Flex, Top Bend, Mounting Channel, 39 in., Aluminum




DI-LIN-TE-SPINE-39

LINAIRE Flex, Top Bend, Mounting Spine Channel, 39 in., White




DI-LIN-TE-MTCL-2

LINAIRE Flex, Top Bend, Mounting Clips, 2 Pack, White



DI-LIN-TE-DEC

LINAIRE Flex, Top Bend, Dead End Cap



DELIVERY OPTIONS

- **Factory + Field (Hybrid) (IP65)**
Fastest order fulfillment. Field connectors and accessories not included.
- **Factory Assembly (IP67)**
Onsite modifications with factory connection. Additional accessories not included.

RECOMMENDED POWER SUPPLIES

For additional Power Supply information, refer to individual Specification Sheet data at diodeled.com.

- VLM
- MEANWELL

VLM SERIES CONSTANT VOLTAGE DRIVER

For additional information visit:

<https://www.diodeled.com/vlm-series-led-driver.html>

Compact driver for on/off, PWM dimming, and color-changing applications.



| SKU | GENERAL SPECS | INPUT VOLTAGE / FREQUENCY | OUTPUT VOLTAGE & MAXIMUM LOAD | MINIMUM LOAD |
|------------------|------------------------------------|---------------------------|-------------------------------|--------------|
| VLM100W-24 | Class 2 5.38 x 1 x 0.77 in. | 120 / 277VAC 47 - 63Hz | 24V / 96W | None |
| VLM100W-24-LPM | Class 2 8.19 x 2.94 x 1.31 in. | 120 / 277VAC 47 - 63Hz | 24V / 96W | None |
| VLM100W-24-LPS | Class 2 11.25 x 3.75 x 1.9 in. | 120 / 277VAC 47 - 63Hz | 24V / 96W | None |
| VLM100W-24-LPS3R | Class 2 10.79 x 7.34 x 2.36 in. | 120 / 277VAC 47 - 63Hz | 24V / 96W | None |
| VLM200W-24-LPL | Class 2 13.5 x 4.5 x 2.38 in. | 120 / 277VAC 47 - 63Hz | 24V / 100W (X2) | None |
| VLM60W-24 | Class 2 5.1 x 0.75 x 0.77 in. | 120 / 277VAC 47 - 63Hz | 24V / 60W | None |
| VLM60W-24-LPM | Class 2 8.19 x 2.94 x 1.31 in. | 120 / 277VAC 47 - 63Hz | 24V / 60W | None |
| VLM60W-24-LPS | Class 2 11.25 x 3.75 x 1.9 in. | 120 / 277VAC 47 - 63Hz | 24V / 60W | None |
| VLM60W-24-LPS3R | Class 2 10.79 x 7.34 x 2.36 in. | 120 / 277VAC 47 - 63Hz | 24V / 60W | None |

MEANWELL CONSTANT VOLTAGE DRIVER

For additional information visit:

<https://www.diodeled.com/mean-well-driver.html>

Drivers for on/off or PWM dimming applications.



| SKU | GENERAL SPECS | INPUT VOLTAGE / FREQUENCY | OUTPUT VOLTAGE & MAXIMUM LOAD | MINIMUM LOAD |
|--------------------------|--|---------------------------|-------------------------------|--------------|
| DI-0954 | Class 2 7.87 x 2.78 x 1.38 in. | 90 ~ 295VAC / 47 ~ 63Hz | 24V / 96W | None |
| DI-0954-LPL | Class 2 11.25 x 3.75 x 1.9 in. | 90 ~ 295VAC / 47 ~ 63Hz | 24V / 96W | None |
| DI-0954-LPS3R | Class 2 10.79 x 7.34 x 2.36 in. | 90 ~ 295VAC / 47 ~ 63Hz | 24V / 96W | None |
| DI-0970 | Class 2 5.83 x 1.57 x 1.18 in. | 90 ~ 264VAC / 47 ~ 63Hz | 24V / 35W | None |
| DI-0970-LPS | Class 2 11.25 x 3.75 x 1.9 in. | 90 ~ 264VAC / 47 ~ 63Hz | 24V / 35W | None |
| DI-0970-LPS3R | Class 2 10.79 x 7.34 x 2.36 in. | 90 ~ 264VAC / 47 ~ 63Hz | 24V / 35W | None |
| DI-CV-24V150W | Not Class 2 7.52 x 2.75 x 1.48 in. | 90 ~ 132VAC / 47 ~ 63Hz | 24V / 150W | None |
| DI-CV-24V200W | Not Class 2 8.46 x 4.53 x 1.18 in. | 88 ~ 264VAC, 47 ~ 60Hz | 24V / 200W | None |
| DI-CV-24V330W | Not Class 2 8.5 x 4.13 x 1.61 in. | 85 ~ 264VAC / 47 ~ 63Hz | 24V / 330W | None |
| DI-CV-24V60W-OWA | Class 2 5.1 x 2.1 x 1.4 in. | 90 ~ 264VAC 127 ~ 370VAC | 24V / 60W | None |
| DI-CV-24V90W-OWA | Class 2 6.75 x 2.5 x 1.5 in. | 90 ~ 264VAC 127 ~ 370VAC | 24V / 90W | None |
| DI-CV-MW24V60W-277 | Class 2 5.9 x 2.1 x 1.4 in. | 120 ~ 277VAC 50/60Hz | 24V / 60W | None |
| DI-CV-MW24V60W-277-LPS | Class 2 11.25 x 3.75 x 1.9 in. | 120 ~ 277VAC 50/60Hz | 24V / 60W | None |
| DI-CV-MW24V60W-277-LPS3R | Class 2 10.79 x 7.34 x 2.36 in. | 120 ~ 277VAC 50/60Hz | 24V / 60W | None |
| DI-CV-MW24V90W-277 | Class 2 6.8 x 2.5 x 1.5 in. | 120 ~ 277VAC 50/60Hz | 24V / 90W | None |
| DI-CV-MW24V90W-277-LPL | Class 2 13.5 x 4.5 x 2.38 in. | 120 ~ 277VAC 50/60Hz | 24V / 90W | None |
| DI-CV-MW24V90W-277-LPS3R | Class 2 10.79 x 7.34 x 2.36 in. | 120 ~ 277VAC 50/60Hz | 24V / 90W | None |
| DI-CV-24V150W-277 | Not Class 2 9 x 2.67 x 1.5 in. | 120 ~ 277VAC 50/60Hz | 24V / 150W / 6.3A | None |
| DI-CV-24V240W-277 | Not Class 2 9.61 x 2.67 x 1.53 in. | 120 ~ 277VAC 50/60Hz | 24V / 240W / 10A | None |
| DI-CV-24V320W-277 | Not Class 2 9.92 x 3.54 x 1.72 in. | 120 ~ 277VAC 50/60Hz | 24V / 320W / 13.34A | None |
| DI-CV-24V480W-277 | Not Class 2 10.31 x 4.92 x 1.72 in. | 120 ~ 277VAC 50/60Hz | 24V / 480W / 20A | None |
| DI-CV-24V600W-277 | Not Class 2 11.02 x 5.67 x 1.9 in. | 120 ~ 277VAC 50/60Hz | 24V / 600W / 25A | None |

RECOMMENDED CONTROLLERS

For additional Controller information, refer to individual Specification Sheet data at diodeled.com.

TOUCHDIAL™ CONTROL SYSTEMS

The TOUCHDIAL™ zone control system controls single color dimming, tunable white, and color changing LED lighting via mobile device and additional TOUCHDIAL controls.



For additional information visit:

<https://www.diodeled.com/touchdial-wifi-color-control-system.html>

| SKU | DESCRIPTION |
|------------------|---|
| DI-RF-REC-CV-A | TOUCHDIAL Color Control System - WiFi Receiver |
| DI-RF-REC-CV-SC | TOUCHDIAL Mini Receiver - Single Channel and Zone |
| DI-RF-REM-DIM-1 | TOUCHDIAL Mini Remote - Single Zone |
| DI-RF-REM-DIM-5 | TOUCHDIAL Remote Dimmer 5-Zone Dimmer Control |
| DI-RF-REM-RGBW-1 | TOUCHDIAL Mini Remote RGB(W) - Single Zone |
| DI-RF-REM-RGBW-4 | TOUCHDIAL Color Control System - RGB/RGBW 4-Zone Remote Controller |
| DI-RF-WMT-RGBW | TOUCHDIAL RGB(W) Wall Control - Single Zone |
| DI-WIFI-RF-TRMS | TOUCHDIAL Color Control System - WiFi Hub |
| DI-RF-REM-TW3-4 | TOUCHDIAL Color Control System, 3-Anchor Tunable White 4-Zone Remote Controller |

CASAMBI® CONTROLLERS

The CASAMBI controllers will remotely control your lighting through the app - downloadable for IOS & Android.



For additional information visit:

<https://www.diodeled.com/casambi-controllers-3020.html>

| SKU | DESCRIPTION |
|-----------------|--|
| CBU-PWM4 | CASAMBI PWM4 Single Color Dimming Controller |
| DI-CBU-PWM5-PRO | Casambi CBU-PWM5-Pro RGB/W/WW Applications, 5 x PWM for constant voltage lights, 4 amps/CH max |

ATTRIBUTE® COLOR CONTROLLERS

Affordable, flexible color controllers for RGB and RGBW LED lighting. Easy to install.



For additional information visit:

<https://www.diodeled.com/attribute-color-controller.html>

| SKU | DESCRIPTION |
|-----------------|--|
| DI-ATT-RGBW-REM | ATTRIBUTE RGB(W) Color Controller and Receiver |

NICOLAUDIE DMX LED CONTROLLERS

Store up to 500 scenes across 10 separate zones with a full-color display.



For additional information visit:

<https://www.diodeled.com/advancedsearch/result?q=Nicolaudie>

| SKU | DESCRIPTION |
|------------|--|
| DI-DMX-DE3 | Nicolaudie STICK-DE3 DMX LED Controller |
| DI-DMX-ESA | Nicolaudie Easy Stand Alone DMX LED Color Controller - 5k Memory |
| DI-DMX-KE2 | Nicolaudie STICK 1 Wall Mount DMX LED Controller - KE2 |

CERTIFICATIONS

Safety

- UL Listed 2108 Low Voltage Lighting System / Low Voltage Luminaire. UL 1598 / CSA 250.0-08, UL 8750. UL 879 / CAN/CSA-C22.2 no. 207-M89. Certified for United States and Canada. File # E469769.
- UL Listed Field Cuttable.
- Approved for storage areas of clothes closets per NEC 410.16.A.1,3 and 410.16.C.1,3,5

Environment

- IP65 - Field Connections and Terminations
- IP67 - Stock Spools and Factory Assembled Fixtures
- Ambient Temperature: -4 ~ 122°F (-20 ~ 50°C)
- Operating Temperature: -4 ~ 176°F (-20 ~ 80°C)

Performance

- LED chip data measured in accordance to IES LM-80-08.
- Photometric & Colorimetry data measured in accordance to IES LM-79-08, in Elemental LED's Innovation Lab.

Safety / Warnings / Disclosures

1. Install in accordance with national and local electrical code regulations.
2. This product is intended to be installed and serviced by a qualified, licensed electrician.
3. Only use copper wiring. Use wires rated for at least 176°F (80°C) and certified for use with external connection of electrical equipment.
4. Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length.
5. Tape light, attached wire leads, and additional extension cables, connectors, etc., are not rated for in-wall installation unless otherwise noted. Tape light and attached wire leads are field-cuttable.
6. Ensure applicable wire is installed between driver, fixture, and any controls in-between. When choosing wire, factor in voltage drop, amperage rating, and type (in-wall rated, wet location rated, etc.). Inadequate wire installation could overheat wires, and cause fire.
7. Do not install in environment where excessive heat may exist (ex. close proximity to fireplace, etc.) See Ambient Temperature ratings
8. Do not install indoor LED tape light products in outdoor / wet location environments. Only wet location tape light models are rated for outdoor / wet locations.
9. Do not modify product beyond instructions or warranty will be void.
10. Tape light must be handled with care. Excessive handling, bending, and pressure may damage the product, voiding the warranty.
11. Actual color may vary from what is pictured on this sheet and other print materials due to the limitations of photographic processes.
12. We reserve the right to modify and improve the design of our fixtures without prior notice. We cannot guarantee to match existing installed fixtures for subsequent orders or replacements in regards to product appearance, CCT, or lumen output.

LIMITED WARRANTY

- 5 Year Limited Warranty

This warranty does not include the additional accessories referenced in this specification sheet. Complete warranty details for fixtures and additional accessories are available at www.diodeled.com/limited-warranty/ within the Policies section. For warranty related questions please contact product support.

Consumer's Acknowledgment

Elemental LED, Inc. stands behind its products when they are used properly and according to our specifications. By purchasing our products, the purchaser agrees and acknowledges that lighting design, configuration and installation is a complex process, wherein seemingly minor factors or changes in layout and infield adjustments can have a significant impact on an entire system. Choosing the correct components is essential. Elemental LED is able to work with the original purchaser to make an appropriate product selection to the extent of the limited information that the customer can provide, but it is virtually impossible for Elemental LED to design a system that foresees every unknown factor. For this reason, this Warranty does not cover problems caused by improper design, configuration or installation issues. Any statement from a Elemental LED employee or agent regarding a customer's bill of goods and/or purchase order is NOT an acknowledgment that the products purchased are designed and configured correctly. The purchase agrees and acknowledges that it is the customer's responsibility to adhere strictly to all information contained in the Product Specification Sheets.

There is often more than one way to design, configure and layout an LED lighting application properly to achieve the same lighting effect. Elemental LED strongly recommends that licensed professionals be used in the design and installation of lighting systems that include Elemental LED products. The specifications include important information that a designer and installer should carefully review and strictly follow. Qualified designers and certified and/or licensed installers, with access to the final installation environment, customer goals, and Elemental LED product specifications can make the requisite decisions appropriate for a successful finished lighting application.

- Lumen value measured in accordance to IES LM-79-08. LED chips have a luminous flux range with a tolerance of +/- 5%.
- Each maximum run requires a dedicated power feed from the driver. Do not extend beyond the recommended maximum run length. Max run may exceed Class 2 limit. Actual wattage may differ from calculated wattage due to voltage drop across run.
- Do not install product in an environment outside the listed ambient temperature. Exceeding the maximum ambient temperature may damage LED chips, reduce the total lamp life, lumen output, and/or adversely impact color consistency.
- Actual efficacy value is dependent to specified LED driver (power supply). An estimated efficacy value can be calculated as follows: Lumen value divided by average power consumption per foot.
- Operating temperature is measured according to the minimum and maximum ambient temperature environment.